


DIV3P

RECLAIM® TRIFOLD ACRYLIC DESK SHIELD – FREESTANDING

Product Specifications

Item Number	DIV3P
Panel Material	Clear acrylic
Panel Thickness	1/4"
Marker Compatibility	Water-soluble dry-erase markers only
Clamp Material	Polycarbonate
Clamp Type	Hinged edge clamp (tightened with built-in screws)
Foot Material	Polypropylene
Foot Pad Type	Choice of EVA foam stick-on pads and double-sided tape (both included)
Required tools for assembly	Philips head screwdriver
Includes	1 main panel, 2 side panels, 4 hinged edge clamps, 4 feet, 4 stick-on pads, double stick tape
Weights and Dimensions	See chart below
Cleaning	Clean with a microfiber cloth and a solution of mild dish soap and water or commercial plastic cleaners rated safe for use on acrylics.*
Marker Compatibility	Water-soluble dry-erase markers only**
Flammability Rating	UL 94, HB
Warranty	5-year limited warranty

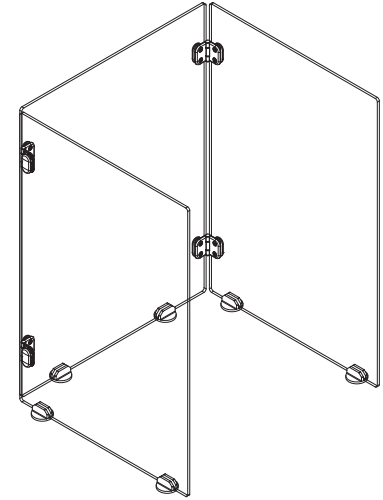

Product #	Product Description	Height	Width	Side Panel Width	Panel Color	# of Clamps	Shipping Method	Product Weight	Box Length	Box Width	Box Height	Shipping Weight
DIV3P-121624C	12" x 24" Clear Acrylic Divider w/ 16" x 24" Side Panels (Trapezoid)	24"	12"	16"	Clear	4	Ground	9 lbs.	26.75"	18.1"	1.6"	11.7 lbs.
DIV3P-181624C	18" x 24" Clear Acrylic Divider w/ 16" x 24" Side Panels		18"					10.4 lbs.	26.75"	18.1"	1.6"	13.25 lbs.
DIV3P-221624C	22" x 24" Clear Acrylic Divider w/ 16" x 24" Side Panels		22"	11 lbs.				26.75"	24"	1.6"	14.3 lbs.	
DIV3P-462024C	46" x 24" Clear Acrylic Divider w/ 20" x 24" Side Panels		46"	17.6 lbs.				49.25"	26"	1.75"	23.15 lbs.	
DIV3P-582024C	58" x 24" Clear Acrylic Divider w/ 20" x 24" Side Panels		58"	20 lbs.				58.25"	26"	1.75"	26.7 lbs.	

IMPORTANT WARNINGS:

***Proper Care and Cleaning of Acrylic – PLEASE READ BEFORE INSTALLING:** Acrylic sheeting can be damaged by harsh solvents and cleaners. Only use cleaning products labeled “commercial plastic cleaners”, or mild soap and water to remove dirt and debris. When applying the cleaner, use a non-abrasive lint-free or microfiber cloth that won't scratch the surface. Never use products containing ammonia, acetone, carbon tetrachloride, scouring compounds, alcohol, bleach, aromatics, or gasoline. Chemical glass cleaners (even if they are environmentally friendly, organic, or non-scented) are also not to be used. All solvents need to be wiped clean with fresh water and blotted dry to reduce and prevent water spotting. Failure to adhere to the above guidelines can cause yellowing, cracks, and scratches in acrylic sheeting and may give the surface a frosted appearance. It will also void the Limited Warranty – our Limited Warranty does not apply to any damage caused by or the result of improper cleaning, handling, installation, operation, maintenance, pressure washing, accident, fire, natural disaster, explosion, abuse, vandalism, chlorine, chemicals from sprinkler systems, or other external forces. This warranty shall be null and void if any harmful solvents are used to clean.

****Use of Dry-Erase Markers:** Water-soluble dry-erase markers are safe for use on these acrylic panels. Other forms of dry-erase markers are not recommended because they will be difficult to erase and could possibly leave stains and ghosting.