
DESKTOP SNEEZE GUARD

DSKTP-SNZ-2x2x1

The Desktop Sneeze Guard is a polished and professional looking extrusion-based sneeze guard featuring clear, 1/8" plexiglass and silver, aluminum extrusion around the perimeter of the frame. It is designed to help prevent the spread of germs, splashes and sprays. Superior quality. Made in the USA.



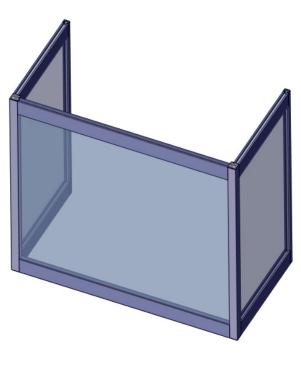

We are continually improving and modifying our product range and reserve the right to vary the specifications without prior notice. All dimensions and weights quoted are approximate and we accept no responsibility for variance. E&OE. See Graphic Templates for graphic bleed specifications.

features and benefits:

- -Easy to assemble
- plexiglass dividers offered off-the-shelf in four.
- clear, 1/8" (3mm) thick plexiglass dividers held in place by15mm extrusion that sits on desk
- Extrusions can be recycled
- One year limited hardware warranty against manufacturer defects

dimensions:

Hardware

Assembled unit: 25.34" w x 23.66" h x 13.06" d 644mm(w) x 601mm(h) x 332mm(d)

Approximate weight with cases: 11 lbs / 5 kgs

Shipping

Packing case(s):

1 APEX

1 SB-3

Shipping dimensions:

APEX

44"l x 28"h x 1"d

1117mm(l) x 711mm(h) x 25mm(d)

SB-3

 $46"l \times 7"h \times 4"d$

1168mm(l) x 177mm(h) x 101mm(d)

Approximate total shipping weight: SB-3 6 lbs / 3 kgs APEX 11 lbs / 5 kgs

additional information:

Refer to related graphic template for more information

Visit: www.exhibitors-handbook.com/ graphic-templates




WARNING: Cancer www.P65Warnings.ca.gov




This product may include the following materials for recycle: aluminum, select wood, fabric, cardboard, paper, steel, and plastics.

ASSEMBLE FRAME

*Not to scale

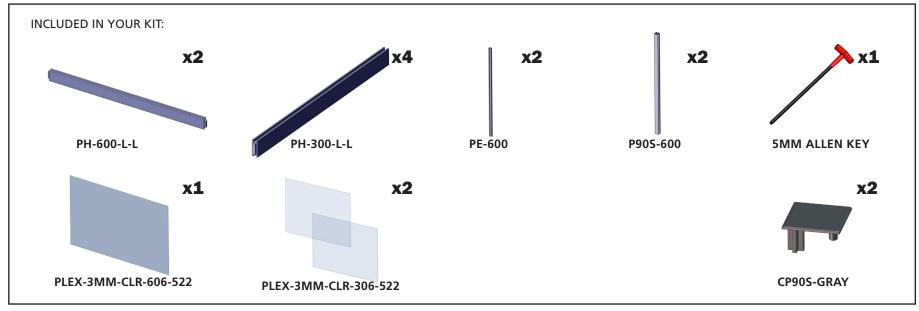


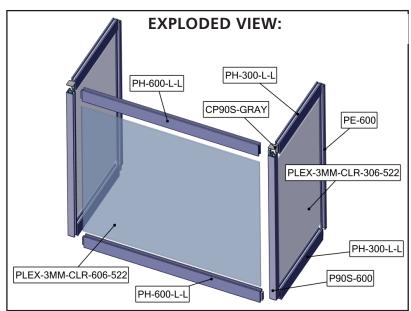



Gather the components to build STEP 1. Use the Exploded View and the Labeling Diagram for part labels. Do not over tighten.




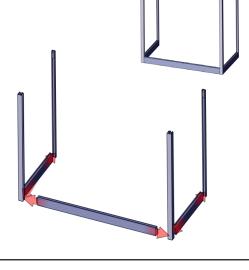


STEP 2:

Gather the plex infill to complete STEP 2. Use the Exploded View and the

Labeling Diagram for part labels.




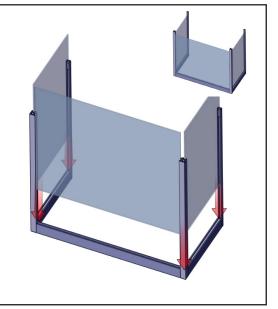

STEP 3:

Gather the components to build STEP 2. Use the Exploded View and the Labeling Diagram for part labels. Do not over tighten PH.



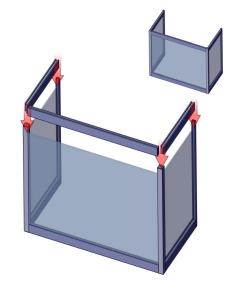

STEP 4:

Gather CP90S caps connect them to the 2 P90S-600 to finish the setup.



