Attention !
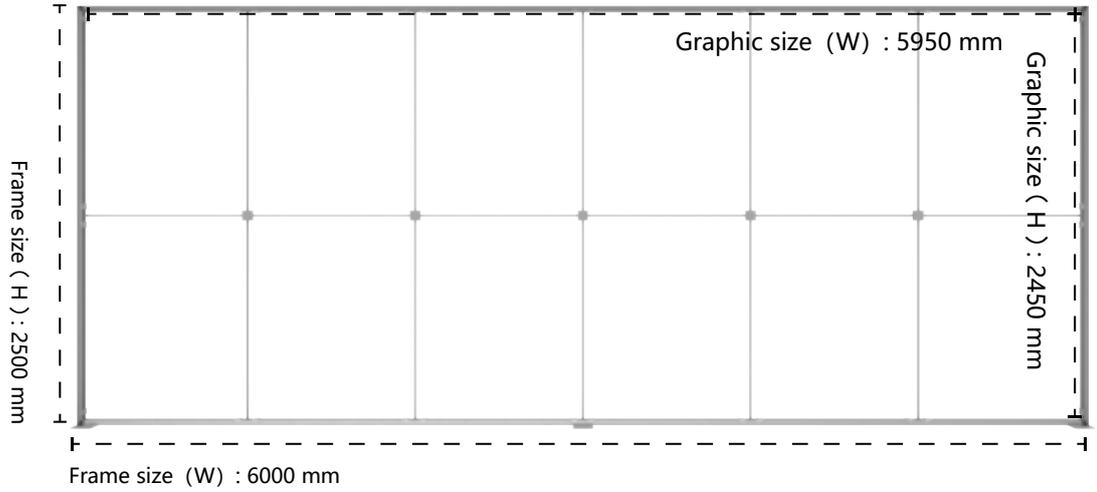
Graphic size:

5950(W) mm x 2450(H) mm

Frame size:

6000(W) mm x 2500(H) mm

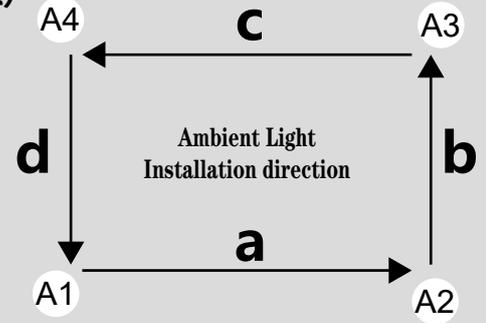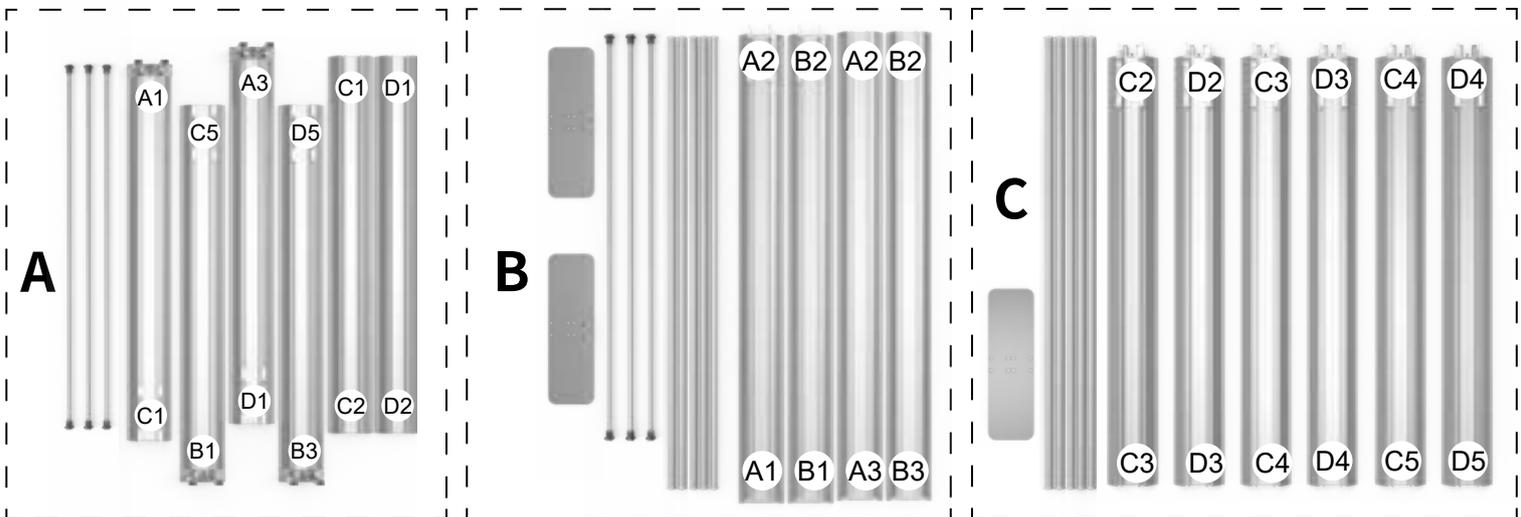Graphic size（W）: 5950 mm

Graphic size（H）: 2450 mm

Frame size（H）: 2500 mm

Frame size（W）: 6000 mm

Part:A   **Part:B**   **Part:C**

Part:D（selected optional）

Ambient Light

A4 — c — A3

d   Ambient Light
Installation direction   b

A1 — a — A2

A1	a : 6000mm	A2
A2	b : 2500mm	A3
A3	c : 6000mm	A4
A4	d : 2500mm	A1

1.Remove the aluminum frame from the package.

A
A1 A3 C1 D1
C5 D5
C1 D1
B1 B3 C2 D2

B
A2 B2 A2 B2
A1 B1 A3 B3

C
C2 D2 C3 D3 C4 D4
C3 D3 C4 D4 C5 D5
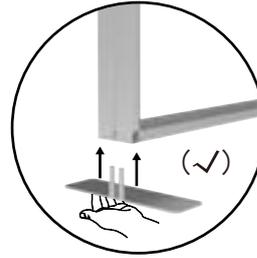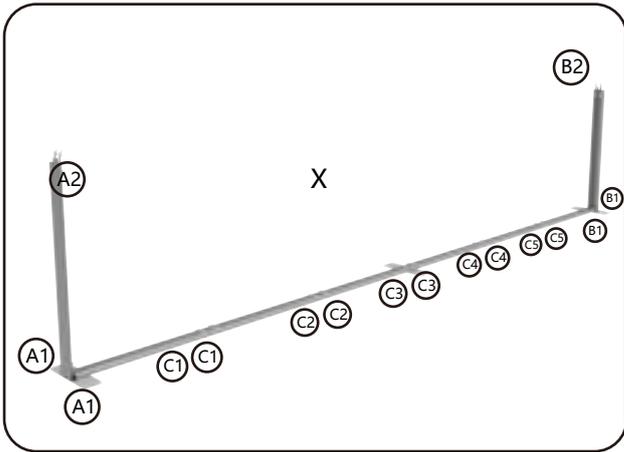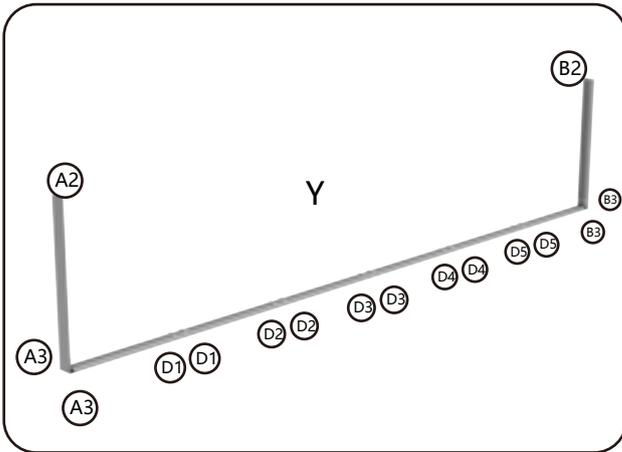
Please use your hands hold on the feet and insert it into the frame. (✓)
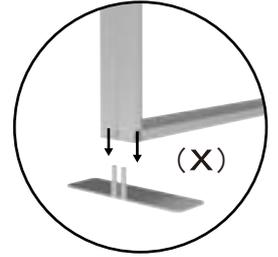
Please do not insert the frame directly into the foot, due to the frame is not inserted by a straight line and may be difficult to connect. (X)

2. Assemble them by the numbers into part" X "and part "Y " ,

pls don`t forget move forward the connectors in the middle

& Lock it by the Wrench.

then connect " X "and "Y " for big square frame,

also, dont forget that move forward the connectors & Lock it.
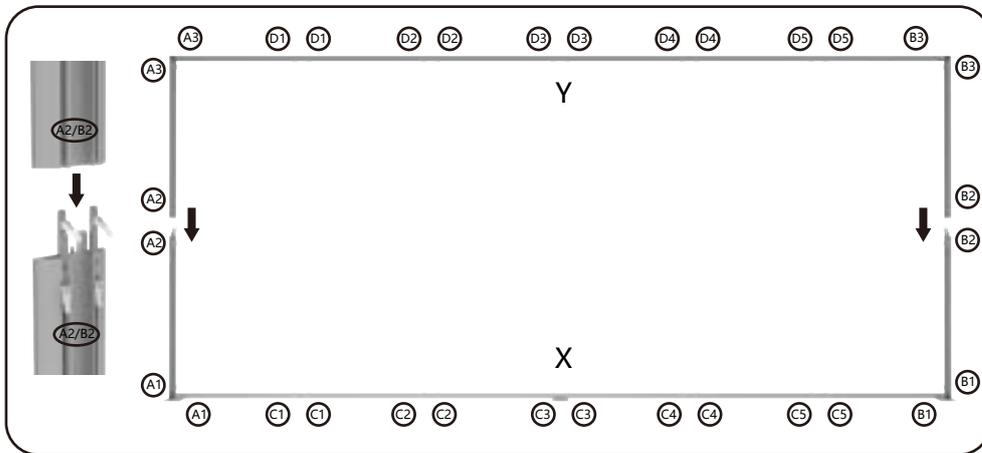
3. Insert the aluminum support rods in the up and

down direction, connect them through the square

plastic parts in the middle,

Rotate the aluminum support rods

until the rod end plastic parts are completely locked,

Repeat the above method so that the left and right

direction spacers are connected to the complete.

Ambient light strips

A1
A2
A3
A4

a : 6000mm
b : 2500mm
c : 6000mm
d : 2500mm

A2
A3
A4
A1

⚠
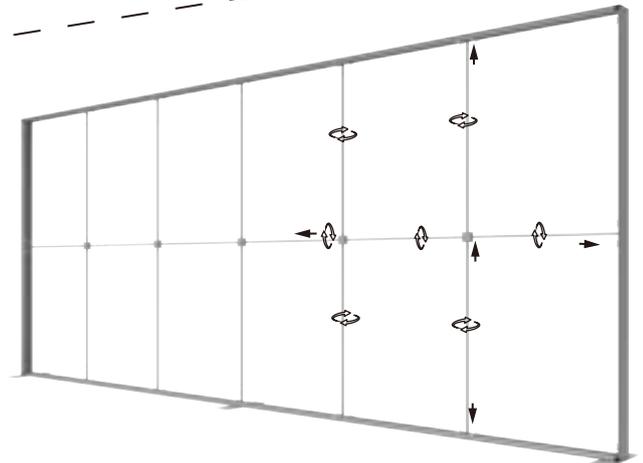
pls disconnect the ambient light plugs from the frame corner at first
before you take off the ambient light strips from the aluminum frame.

A4
A4
c
A3
A3
d
b
a
A2
A2
A1
A1

A4 c A3
d b
A1 a A2

A1
A1
A1
A1
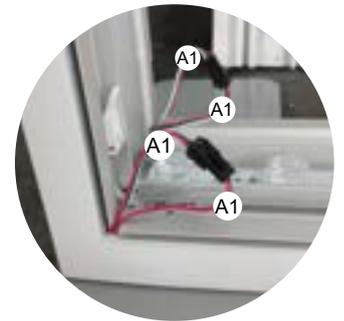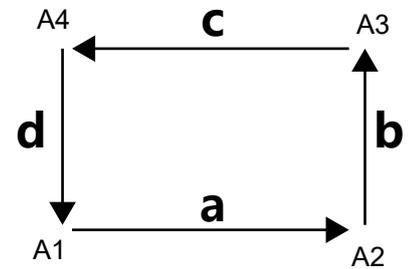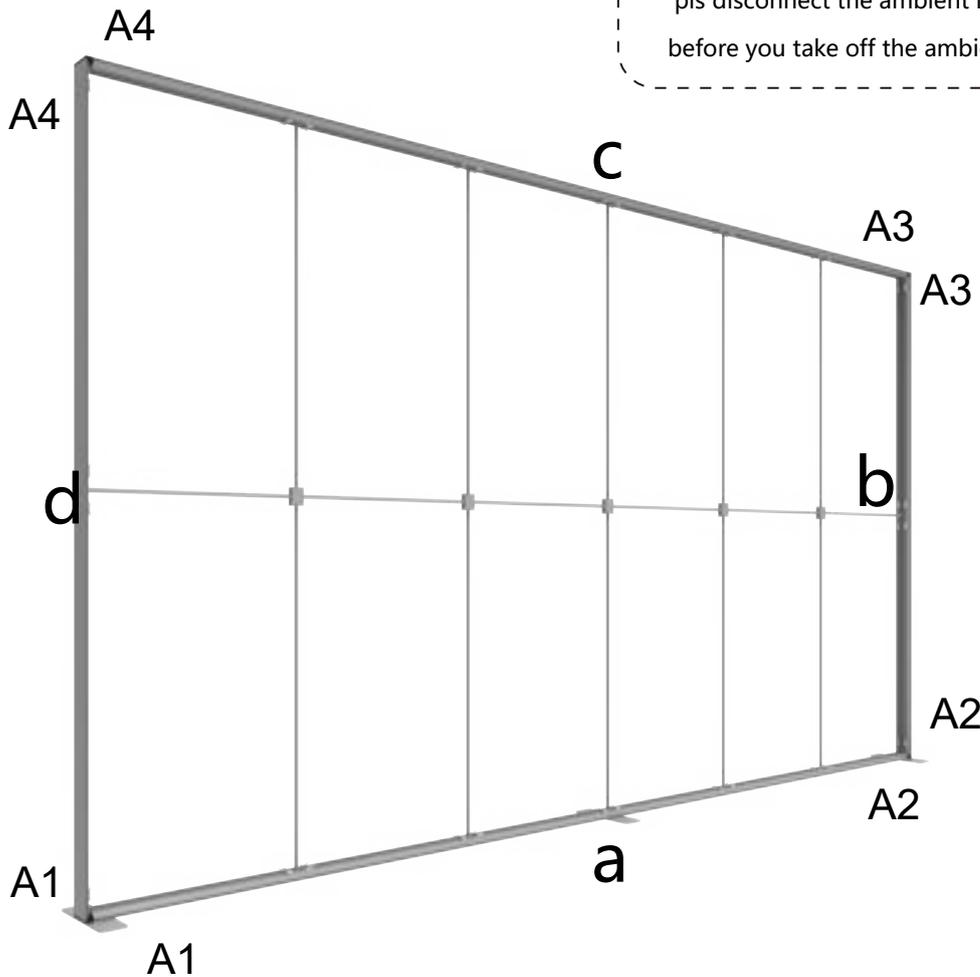
4. Install the ambient light according to the position and direction of a, b, c and d,
   please note that the numerical markings of the connectors need to correspond to each other and be consistent,
   connect all the adapters, test the top and bottom led lights working well or not , (note D.C plug separatly)
   after test the ring ambient light through the remote control, testing and confirm they are working normally,
   and then disconnect the power and go to nex step.

PS: the Light box with a remote control receiver inside, QR code are printed on the face ,
you are easy to SCANNING the code and download the APP, the ambient light control receiver will
through the phone bluetooth connection, you can change the ambient light color types and styles by the APP.

5. The last step is to start installing the front and back graphics, after completion, turn on the power again,
   the product is complete installation.

   When you disassemble, the steps are reversed in sequence