
LUMIÈRE CONFIGURATION - B (NO LIGHTS)





On frame On graphic



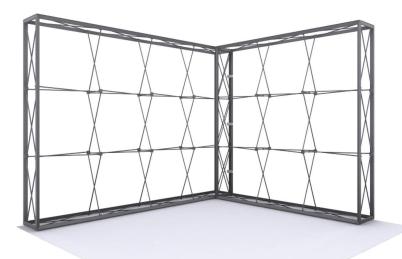



PRODUCT DESCRIPTION


Introducing the Lumiere Light Wall! A combination of innovative silicone-edge graphics and RPL fabric pop ups offers an easier and more cost effective SEG option. This SEG style display has the depth of the RPL so you can expose more of your message using endcap graphics. The Lumiere shrinks down in size - simply collapse the geometric frame and the SEG bungeed channel bars, and fold or roll the fabric graphics. Setup can be done by 1 person and in 5-10 minutes. SEG portability is easy and stylish.

DISPLAY DIMENSION	118.1" W x 88.6" H x 103" D
GRAPHIC DIMENSIONS	
4X3 MAIN GRAPHICS	118.5" W x 89" H (2 Graphics)
4X3 END CAP GRAPHICS	14.25" W x 89" H (2 Graphic)
3X3 MAIN GRAPHICS	89" W x 89" H (2 Graphics)
3X3 END CAP GRAPHICS	14.25" W x 89" H (1 Graphic)
FRAME CONFIGURATION QUANTITY	
4X3 FRAME	1 Frame
3X3 FRAME	1 Frame
GRAPHIC MATERIAL	
Stretch Fabric	
GRAPHIC FINISHING	
Silicone beading is sewn around the perimeter of the fabric graphic. Silicone beading is hidden from view once installed.	
DISPLAY CONSTRUCTION	
Aluminum Frame	
SHIPPING WEIGHTS & DIMENSIONS	
4x3 Lumiere Light Wall (1 box)	
Shipping Weight	35 lbs (frame only) 39 lbs (with graphics)
Shipping Dimensions	34" L x 14" W x 9" H
3x3 Lumiere Light Wall (1 box)	
Shipping Weight	28 lbs (frame only) 32 lbs (with graphics)
Shipping Dimensions	34" L x 14" W x 9" H
GRAPHIC TURN AROUND TIME	
2 business days after proof approval	
AVAILABILITY CA and PA	

L Link Connector

LUMIÈRE CONFIGURATION - B (NO LIGHTS)

PRODUCT CODE: LLW10BNL

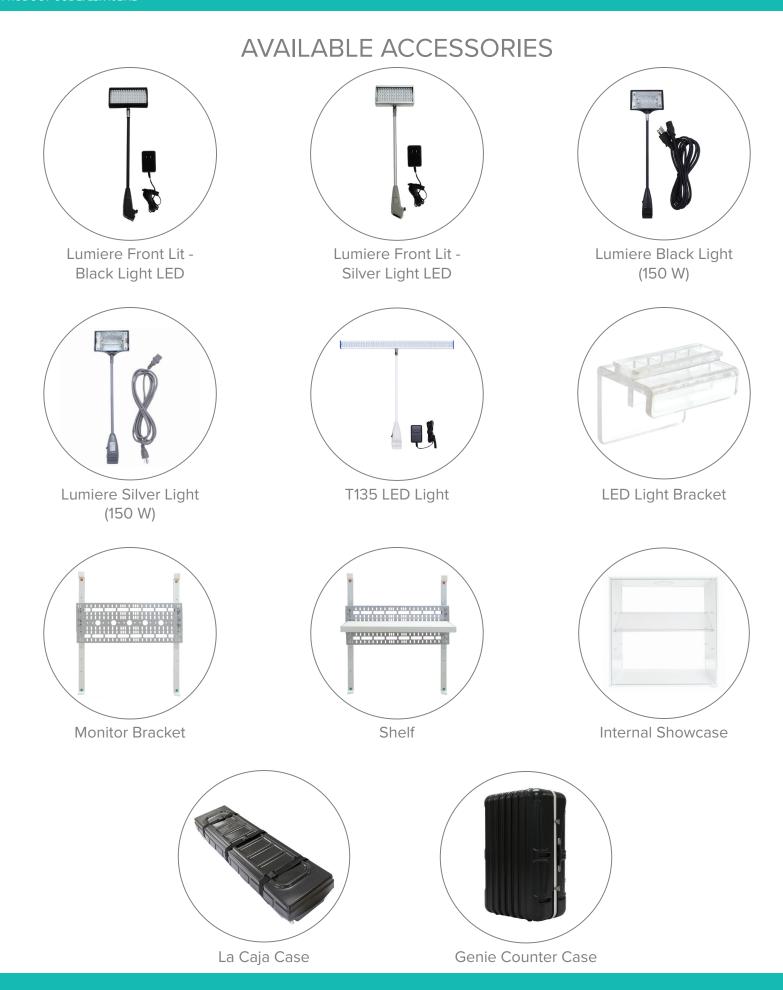

PRODUCT CODE: LLW10BNL




SET UP INSTRUCTIONS

Set Up Pop Up Frame



a. Place frame with the adjustable feet facing down.


Insert Channel Bars




a. Expand each channel bar. Follow bungee to connect.

- **b.** Expand the frame.

b. Attach channel bars to frame.

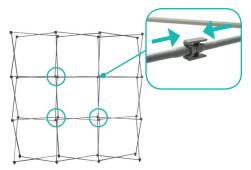

c. Close frame by pushing the outside of the frame until male and female ends connect.



c. Slide channels bars onto frame, from top to bottom, then secure onto metal peg.




d. Attach the top and bottom endcaps on each side of the frame.

Install Graphic



a. In each corner, insert the silicone edge beading into the groove.

Optional Accessories

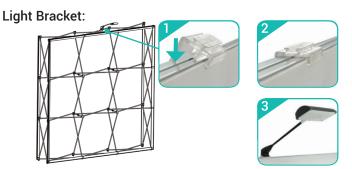


a. Snap the LED Light Bracket on top of the frame. Then slide the LED Light onto the bracket.



b. Then insert the remainder of the beading.




c. Repeat graphic installation on the end caps.

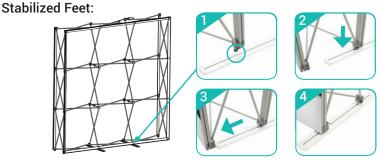


a. From the back, lift frame and insert adjustable feet onto stabilized feet. Then slide stabilized feet toward and insert onto the adjustable feet.

SET UP INSTRUCTIONS

Connecting Return Wall

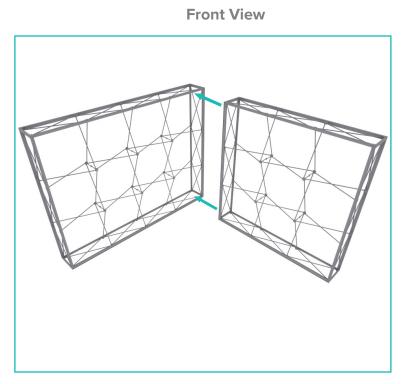

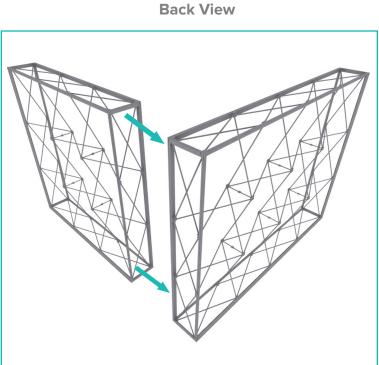

Adjoin the 3x3 frame perpendicular (90° angle) to the front side of the 4x3 frame.

Slide L Connector onto the channel

bars of both frames.

Note: Rendering shown without graphics for clarity. 4x3 front side graphic must be installed before connecting frames.


L Link Connection



*Starting from behind, pull the 4x3 graphic away to make space for L Connector.






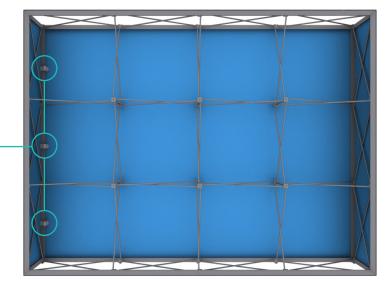

*Back side of 4x3 shown above.



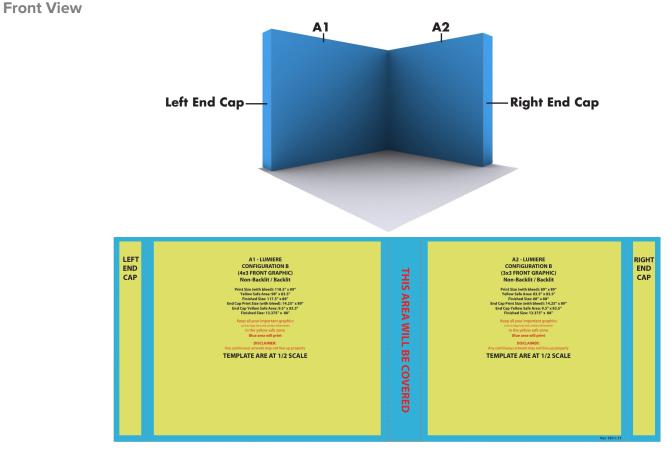

Back View

