



On frame On graphic



3 units side by side
for 1 large display

PRODUCT DESCRIPTION

Expedite your banner stand setup time even further with our brand new Econotube display! The frame is 33.5"W x 90"H and is very lightweight compared to similar products. Place several units side by side to create a larger graphic display. Choose between a single or double-sided dye-sub printed graphic. Tilt or lay down frame to drape on pillow case style graphic, then zip the bottom for a perfect fit!

DISPLAY DIMENSIONS	33.5"W x 90"H
GRAPHIC SIZE	34.25"W x 91.25"H

GRAPHIC MATERIAL

Stretch Fabric

GRAPHIC FINISHING

Dye sublimated print. Pillowcase finishing.

DISPLAY CONSTRUCTION

Aluminum tube frame and feet.

SHIPPING WEIGHTS & DIMENSIONS

Shipping Weight	6 lbs (stand only) 7 lbs (frame and graphic)
Shipping Dimensions	5"H x 4.75"W x 36"D (1 unit)

LARGE QUANTITY FREIGHT

Freight Shipping	16 master boxes per 40" x 40" x 67" skid (6 units per master box)
Freight Weight	621 lbs (frame only) 717 lbs (frame & graphic)

GRAPHIC TURN AROUND TIME

2 business days after proof approval

AVAILABILITY	CA
--------------	----



Aluminum tubing
25mm (1")



Foot
17.6"L x 1.6"W
(Pole Offset 6mm / 13mm)




Portable nylon bag


PARTS LIST




Top / Corner tubing Qty.1
33.5"W x 3"H

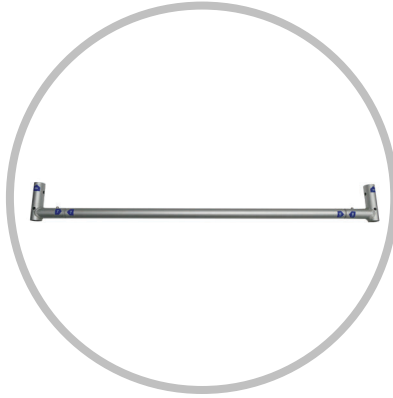


Bottom / Corner tubing Qty.1
33.5"W x 3"H

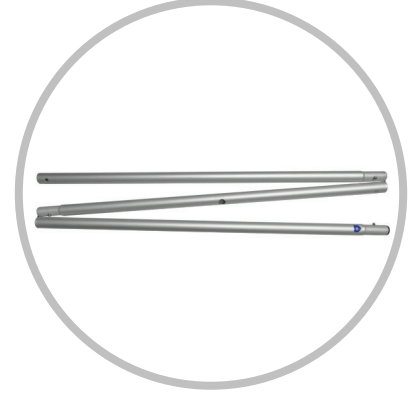

3 pc. side tubing Qty.2
86.5"L

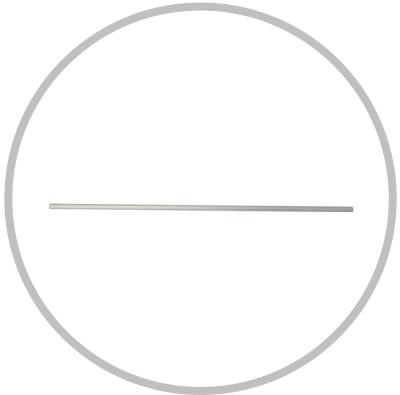

Middle support bar Qty.1
33.25"L

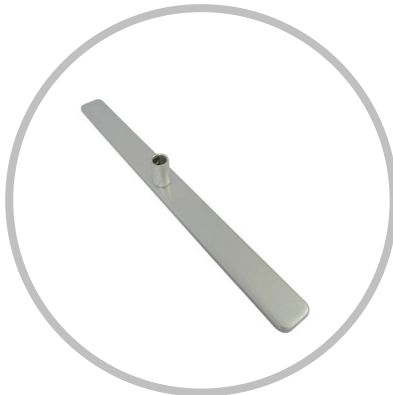


Feet Qty.2
17.6"L x 1.6"W



Portable Nylon Bag Qty.1


INSTRUCTIONS

1. Connect



Connect the 3 pc. bungee linked tubes together.

2. Press



Press down on push cap then insert tube into opposite end.

3. Snap



Push cap will snap when tube is inserted. Repeat for one pair.

4. Connect top tube.




Connect numbered tubes together starting with the top tube.

5. Connect bottom tube




Connect numbered tubes together with the bottom tube.

6. Insert middle support bar



Insert one end at a time until middle support bar slips into place.

7. Connect feet.



Connect both feet to the bottom of the frame



Keep each foot offset with the thinnest side on the outside.

8. Frame is complete.



Frame is ready for graphic installation.

9. Drape and Pull



Drape bottom of graphic over the top of the frame. Pull graphic all the way down.

10. Zip / Close



Zip underneath the bottom support pole, maximizing fabric tension.

