Hybrid Pro Modular Kit 38

Hybrid Pro 20x20 Modular Island Kit 38

Hybrid Pro™ Modular Kit 38 is a commanding 20ft x 20ft island exhibit that offers the ideal layout for meetings and demonstrations. Kit 38 features a 16ft tall wall, ideal for prominently displaying your brand, as well as three demonstration areas for optimal product and service show and tell. This exhibit kit will make you stand out from the rest and is available for purchase or rent.



features and benefits:

- 16ft tall wall
- Two Laminate Counters (74"W x 40.5"H x 22"D) with storage (65" monitor shown, but not included)
- 17ft dia, fabric structure ring, which is attached to the backwall and kiosks
- Two demonstration kiosks: 59"W x 94H" walls + Hybrid Pro Counter 19's with graphics (50" monitor shown, but not included)


This product may include the following materials for recycle: aluminum, select wood, fabric,

cardboard, paper, steel, and plastics.

- One Hybrid Pro Counter 19 serves as a reception
- Kit includes frame, 8 SEG graphic panels. three Hybrid Pro 19 Counters, one Laminate Counter and one Woodcrate
- Flooring and monitors shown not included
- Lifetime hardware warranty against
- manufacturer defects

dimensions:	
Hardware	Graphics
Assembled unit: 207.17"w x 188.98"h x 207.17"d 5962mm(w) x 4800mm(h) x 5262mm(d) Approximate Weight: 1225 lbs / 556 kg	Refer to related graphic templates for more information Visit: https://www.theexhibitorshandbook.com/downloads/download-graphic-templates or click here
Shipping	additional information:
Packing case(s): 1 WOODCRATE-H-02 Shipping dimensions: WOODCRATE-H-02: 100"W x 50.5"D x 52.5"T 2540mm(l) x 1283mm(h) x 1334mm(d)	Laminate Panel Colors: Dove Black Designer Fusion Maple
Approximate shipping weight: 1834 lbs / 832 kg	2 person assembly recommended:

We are continually improving and modifying our product range and reserve the right to vary the specifications without prior notice. All dimensions and weights quoted are approximate and we accept no responsibility for variance. E&OE. See Graphic Templates for graphic bleed specifications

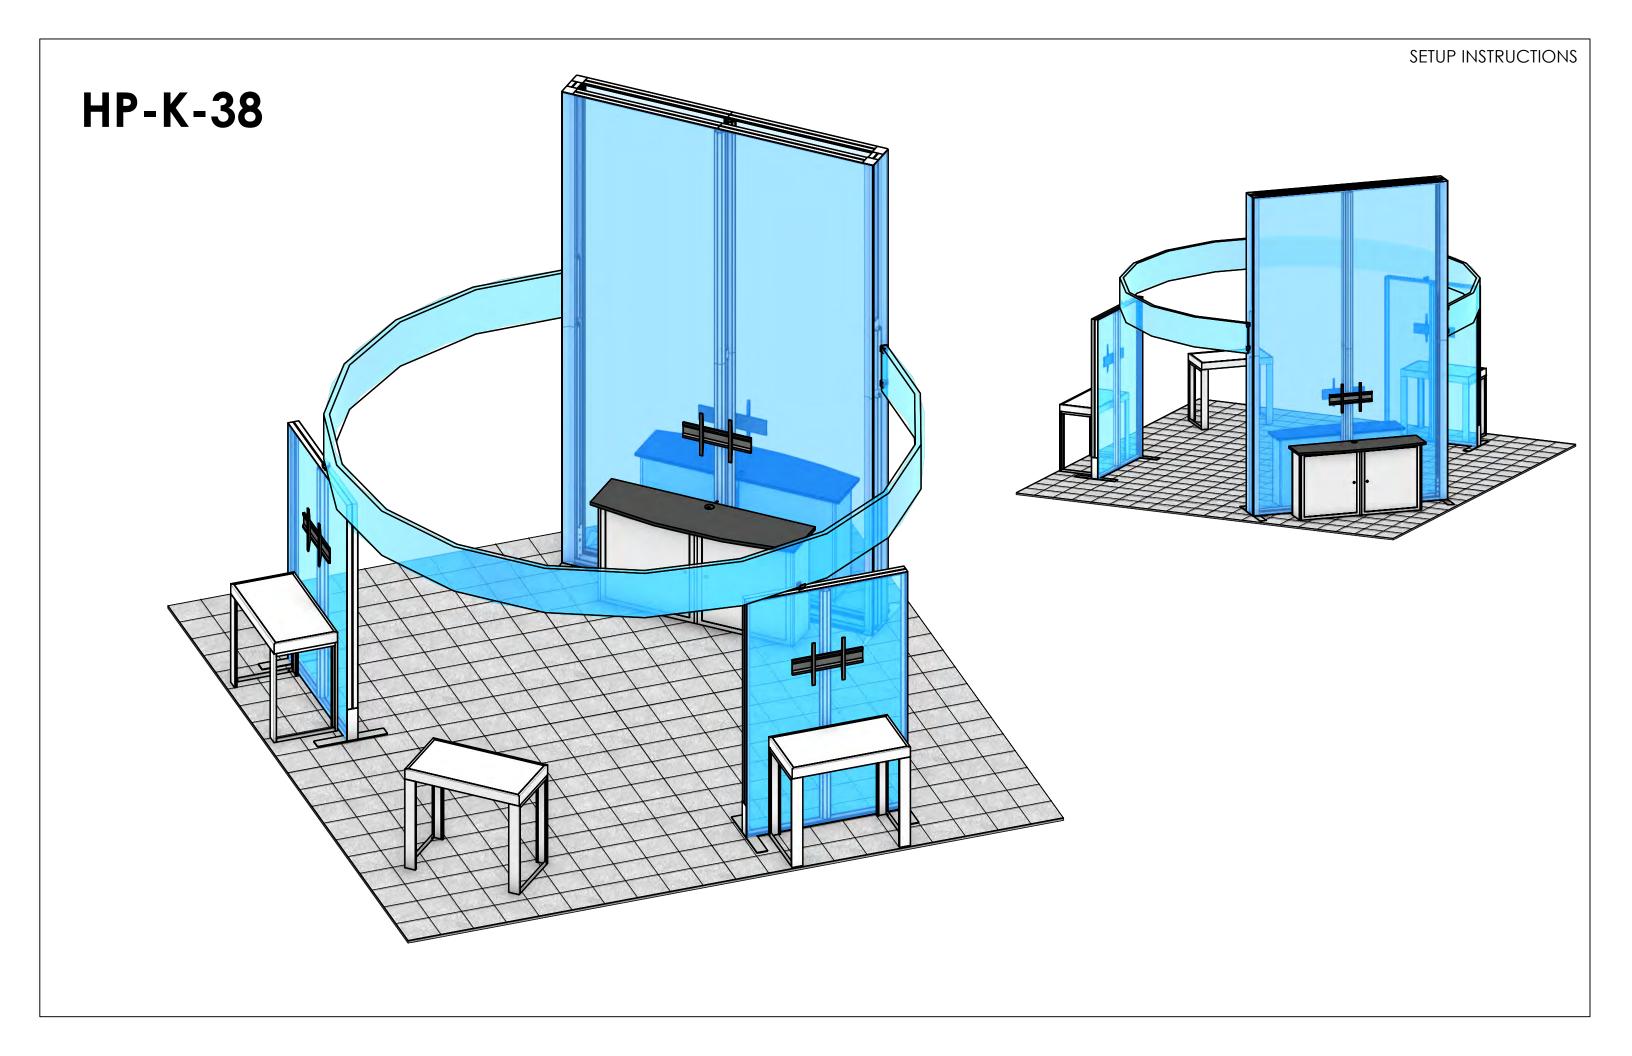

PROJECT BOM

SETUP#	HARDWARE	#	DESCRIPTION
20x20	20x20	1	20x20
A1	102-100-01-01	8	100MM LENGTH OF PH2 EXTRUSION-WITH CAM LOCKS BOTH ENDS
A2	102-111-01-01	3	111MM LENGTH OF PH2 EXTRUSION-WITH CAM LOCKS BOTH ENDS
A3	102-300-01-01	4	300MM LENGTH OF PH2 EXTRUSION-WITH CAM LOCKS BOTH ENDS
A4	102-600-11	4	600MM LENGTH OF PH2 EXTRUSION WITH TENSION GLIDES
A5	242-600-01-01	2	600MM LENGTH OF PM4R8-WITH CAM LOCKS BOTH ENDS
A6	242-2310-01-01	4	2310MM LENGTH OF PM4R8-WITH CAM LOCKS BOTH ENDS
A7	242-2348-01-10	4	2348MM LENGTH OF PM4R8-WITH STOP AT 315MM ONE SIDE-WITH CAM LOCKS ONE END
A9	245-600-11	2	600MM 4-WAY INTERNAL CONNECTION EXTRUSION W/ 8 TENSION GLIDE
A10	340-100-01-01	4	100MM LENGTH OF PHFC4 EXTRUSION-WITH CAM LOCKS BOTH ENDS
A11	340-1394-01-02	8	1394MM LENGTH OF PHFC4 EXTRUSION-WITH IB2 LOCK HOLES ONE END-CAM LOCK ONE END
A12	340-1500-03-03	4	1500MM LENGTH OF PHFC4 EXTRUSION-WITH MITRE CUT BOTH ENDS
A13	340-2400-03-03	4	2400MM LENGTH OF PHFC4 EXTRUSION-WITH MITRE CUT BOTH ENDS
A14	342-2386-10-10	8	2386MM OF PMFC4-90-B EXTRUSION -WITH STOPS AT 315MM
410-1000-	410-1000-42	8	1000MM LENGTH OF WHITE LAMINATED P90S EXTRUSION
418-1000-	418-1000-42	2	1000MM LENGTH OF WHITE LAMINATED PT EXTRUSION
419-1000	419-1000	2	1000MM LENGTH OF PX EXTRUSION
СВ9	СВ9	8	90 DEGREE JOINER
C-M-01-1	C-M-01-132100	1	(STRUCTURE-01) 2600MM RADIUS X 450MM H X 50MM RING STRUCTURE
C1-1	COUNTER TOP	3	COUNTER TOP
C2	CT-72L-01	2	(TOP-01) 1960MM X 539MM X 30MM BLACK LAMINATE COUNTER TOP BLACK TOP (1595-60)
C3-1	C-W-02-132100	2	(SHELF-01) 906MM X 306MM X 15MM LAMINATE SHELF CUSTOM LAMINATE - W.D.WHITE (D354-60)
C3-2	C-W-02-132100	2	(SHELF-01) 906MM X 306MM X 15MM LAMINATE SHELF CUSTOM LAMINATE - W.D.WHITE (D354-60)
EXT-LG-M	EXT-LG-MB	4	Large LCD Monitor mount, 37" - 70" size, 110 Lb. max. weight, Tilting-with extrusion mounted hardware
GRMT-CA	GRMT-CAP-RNG-BLK	2	BLACK CAP & RING FOR 2 1/2" GROMMET (77-24-106)
IB2-O	IB2-O	4	JOINER BAR (OLD STYLE)
C1-2	LEG	6	LEG
A15	LP-300-1000	4	300MM W X 1000MM H LOCK PANEL
A16	LP-900-1000	4	900MM W X 1000MM H LOCK PANEL
A17	LP-CD-900-1000	4	900MM W X 1000MM V LOCK PANEL CABINET DOOR
PMFC4-90	PMFC4-90-B-CAP	8	PLASTIC MOLDED END CAP FOR THE PMFC4-90-B EXTRUSION
SS1-S	SS1-S	16	SHELF SUPPORT PIN
SW-FOOT-	- SW-FOOT-650-LN	4	650MM SMART WALL FOOT
SW-FOOT-	- SW-FOOT-900-LN	2	900MM SMART WALL FOOT
TC-50MM	- TC-50MM-SILVER	6	SILVER ANODIZE FINISH 50MM TUBE CLAMP
SETUP#	GRAPHICS	#	DESCRIPTION
GR-A1	HP-38-A-G	1	GRAPHIC (A1) (121.68 w X 192.27 h total size) 117.68 w X 188.27 h finish size, Dye-sub print on Eclipse Blockout Stretch, single sided, sewn with FCE-2 silicone beading around perimeter & pull tab in bottom right corner (-WITH CUTS FOR PH2)
GR-B1	HP-38-B1-G	1	GRAPHIC (B1) (62.94 w X 98.37 h total size) 58.94 w X 94.37 h finish size, Dye-sub print on Eclipse Blockout Stretch, single sided, sewn with FCE-2 silicone beading around perimeter & pull tab in bottom right corner

PROJECT BOM

GR-B2	HP-38-B2-G	1	GRAPHIC (B2) (62.94 w X 98.37 h total size) 58.94 w X 94.37 h finish size, Dye-sub print on Eclipse Blockout Stretch, single sided, sewn with FCE-2 silicone beading around perimeter & pull tab in bottom right corner
GR-A2	HP-38-B-G	1	GRAPHIC (A2) (15.85 w X 192.27 h total size) 11.85 w X 188.27 h finish size, Dye-sub print on Eclipse Blockout Stretch, single sided, sewn with FCE-2 silicone beading around perimeter & pull tab in bottom right corner
GR-C1	HP-38-C1-G	1	GRAPHIC (C1) (62.94 w X 98.37 h total size) 58.94 w X 94.37 h finish size, Dye-sub print on Eclipse Blockout Stretch, single sided, sewn with FCE-2 silicone beading around perimeter & pull tab in bottom right corner
GR-C2	HP-38-C2-G	1	GRAPHIC (C2) (62.94 w X 98.37 h total size) 58.94 w X 94.37 h finish size, Dye-sub print on Eclipse Blockout Stretch, single sided, sewn with FCE-2 silicone beading around perimeter & pull tab in bottom right corner
GR-A3	HP-38-C-G	1	GRAPHIC (A3) (121.68 w X 192.27 h total size) 117.68 w X 188.27 h finish size, Dye-sub print on Eclipse Blockout Stretch, single sided, sewn with FCE-2 silicone beading around perimeter & pull tab in bottom right corner
GR-A4	HP-38-D-G	1	GRAPHIC (A4) (15.85 w X 192.27 h total size) 11.85 w X 188.27 h finish size, Dye-sub print on Eclipse Blockout Stretch, single sided, sewn with FCE-2 silicone beading around perimeter & pull tab in bottom right corner

FABRIC, VINYL & UV GRAPHIC CARE GUIDELINES

GENERAL HANDLING FABRIC GRAPHICS

- Your fabric graphics should always be handled in a clean and dry area with clean hands. When possible, use white fabric gloves.
- Be sure fabric is clean and dry before packing.
- Machine washing and/or drying is not recommended for all fabrics. Refer to the chart below for which fabrics are washable.

EMERGENCY STAIN TREATMENT (FABRIC)

- 1. For dry stains, like loose dirt or pencil marks, try inititally using masking tape or Magic Eraser (dry-not moistened).
- 2. Introduce water or liquids to treat stains, if at all possible, treat the stain with fabric off of the frame.
- Place a clean dry cloth behind stain (to absorb stains while being treated). Mositen another cloth initially with just water (distilled water is optimal, if available).
- Gently blot stain with moistened cloth (or small area of moistened Magic Eraser), while trying to push stain through to the back, using the dry cloth to absorb.
- Repeat using care to keep the wet area as small as possible.
- Grandma's Secret Spot remover can be an effective stain remover. Mix severall drops in a small cup with clean water. Repeat above and using dry cloth on back of stain to absorb.

MACHINE WASHING FABRIC GRAPHICS

- Cold water/delicate cycle/tumble dry low or air dry. For stretch fabrics do not use dryer, let hang dry.
- Use caution on dryer time with graphics containing liners. It's best to put tension fabric on frame when fabric is still damp and let it air dry. Always be sure that the aluminum frame is clean when mounting the damp graphic.
- Fabric stretch graphics that are washed and mahcine dried may shink up to 3/4" per every 50" of fabric in the direction of the stretch and shink up to 1/4" in non stretch direction.

STORING & PACKING BACKLIT GRAPHICS

- To avoid cracks in the ink or having to steam graphics, Backlit fabrics should be loosely folded with bubble wrap or stored around a tube.
- Avoid folding the graphic tightly to store in a small bag or box.

GENERAL HANDLING VINYL & UV GRAPHICS

- Vinyl banners and rigid graphics should always be handled in a clean and dry area with clean hands. When possible, use white fabric groves.
- Be sure vinyl/ UV is clean and dry before packing. Always follow material handing and packing instructions included.
- All vinyl material should be rolled with graphic facing in to protect the graphic printed side. Roll on a tube in available.
- Avoid folding material to reduce the risk of crease lines and chipped inks. If a graphic must be folded, try and fold loosely and as few times as possible.

EMERGENCY STAIN TREATMENT (UV)

- For dry stains, like loose dirt, pencil marks or adhesive, try
 initially using masking tape, Masking tape can be quite
 effective at lifting dry surface dirt. Try 'pulling' as much of
 stain away as you can and avoid rubing the stain into the
 material.
- While using Windex® avoid scrubbing harshly. Too much pressure can fade the graphic print.

GENERAL HANDING OF ROLLABLE PVC PANELS

All mural panels, truss panels and detachables should be rolled with the graphic facing out to protect the graphic printed side. Mural panels should be stored in the original plastic sleeves that are provided with the panels.

STEAMING FABRIC GRAPHICS

- For optimal results, steam wrinkles when fabric is tensioned and installed securely on the frame.
- Fill steamer with clean drinking water or distilled water. Avoid using water containing hard minerals.
- Hold steamer upright and hold close to fabric. Avoid touching fabric with steamer.
- Do not tap steamer as water drips may cause water marks to from on graphic

*IF WRINKLES APPEAR -STEAM FABRIC FROM THE FRONT SIDE OF THE FABRIC. *IF WRINKLES APPEAR 1-STEAM FABRIC FROM THE BACK SIDE OF THE FABRIC WHEN POSSIBLE. *IF WRINKLES APPEAR 1-STEAM FABRIC FROM THE BACK SIDE OF THE FABRIC WHEN POSSIBLE. *IF WRINKLES APPEAR 1-STEAM FABRIC FROM THE RONT SIDE OF THE FABRIC WHEN POSSIBLE. *MAKE SURE FABRIC FROM THE FABRIC *MAKE SURE FABRIC STOLDED WITH THE IMAGE FABRIC IS FOLDED WITH THE IMAGE *MAKE SURE FABRIC IS FOLDED WITH THE IMAGE WITH THE


FABRIC					
	WASHING MACHINE	DRY CLEAN	SPOT CLEAN	STEAMING / IRON	MAGIC ERASER
RESILIENCE	NO	NO	NO	NO	YES (ONLY ON WHITE)
OXFORD	YES	YES	YES	YES	YES
POWER STRETCH	YES	YES	YES	YES	YES
DISPLAY POLYESTER	YES	YES	YES	YES	YES
DISPLY POLY TABLE THROWS	YES	YES	YES	YES	YES
OUTDOOR FLAG	YES (MUST VELCRO THE TABS)	N/A (MUST VELCRO THE TABS)	YES	YES	YES
CANVAS OUTDOOR	NO	NO	YES	STEAM ONLY	YES
CANVAS LIGHTBOX	NO	NO	NO	STEAM ONLY	YES
AGILITY	YES	YES	YES	(ONLY W/ 100% TENSION)	YES
SUPER STRETCH	YES	YES	YES	(ONLY W/ 100% TENSION)	YES
TRIPLE WHITE	YES	YES	NO	YES	NO
ECLIPSE	NO	NO	YES	STEAM ONLY	YES
SOFT KNIT	YES	YES	YES	YES	YES
SHEER	YES	YES	YES	YES	YES
VINYL & ROLLABLE					
	SOLVENT	SOAPY WATER (Dawn)	WINDEX		
FLATMAXX	ONLY ON WHITE	YES	NO		
SCRIM 130Z/ 180Z	ONLY ON WHITE	YES	NO		
VINLY 20OZ	ONLY ON WHITE	YES	NO		
MELINEX	NO	YES	NO		
MURAL PANELS	NO	YES	YES		
UV RIDGED	NO	YES	YES		

SETUP NOTES

Redesign of this exhibit without approval by Orbus may result in dangerous and unsafe structures. Nimlok disclaims any responsibility for redesigned exhibits it does not approve in writing.


Parts and components such as panels and extrusions are manufactured to metric sizing. Where ever possible sizes have been noted in feet and inches as well as in metric. Below is the imperial to metric sizing table for reference. "Nominal" refers to approximate size.

NOTE: PARTS MAY COME PRE-ASSEMBLIED FOR PACKING PURPOSES.

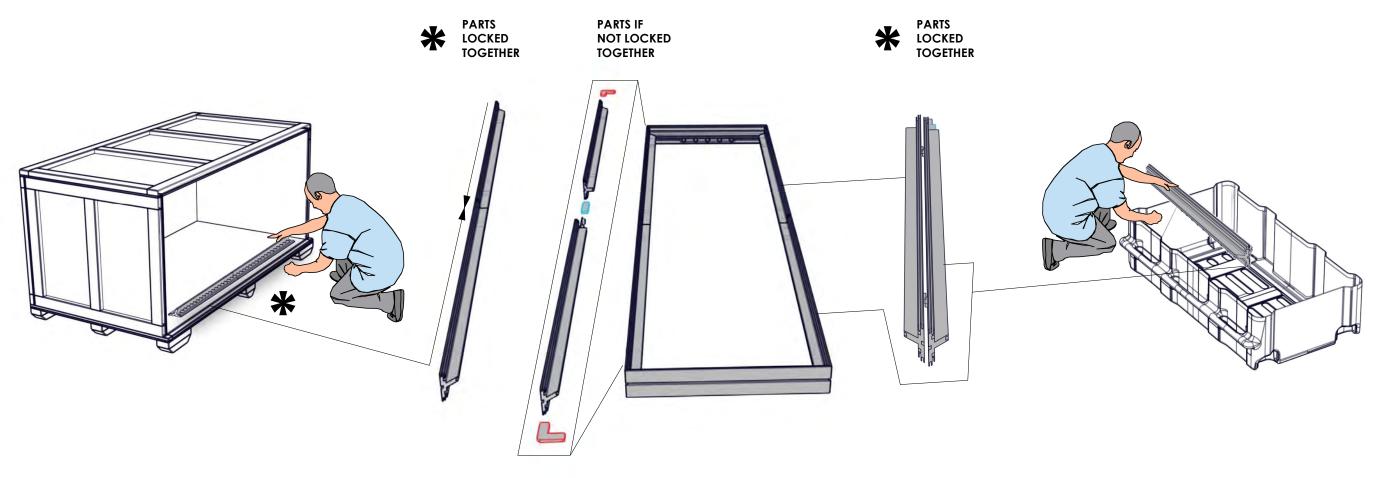

METRIC TO IMPERIAL DIMENSION

2400mm = $(94.50")$	1200mm = $(47.25'')$
2100mm = (82.67")	900mm = (35.43")
1800mm = $(70.87")$	600mm = $(23.62")$
1500mm = $(59.05")$	300mm = (11.81")

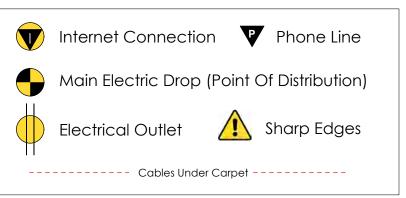

HELPFUL SETUP QR CODES













SCAN QR CODES WITH YOUR PHONE CAMERA

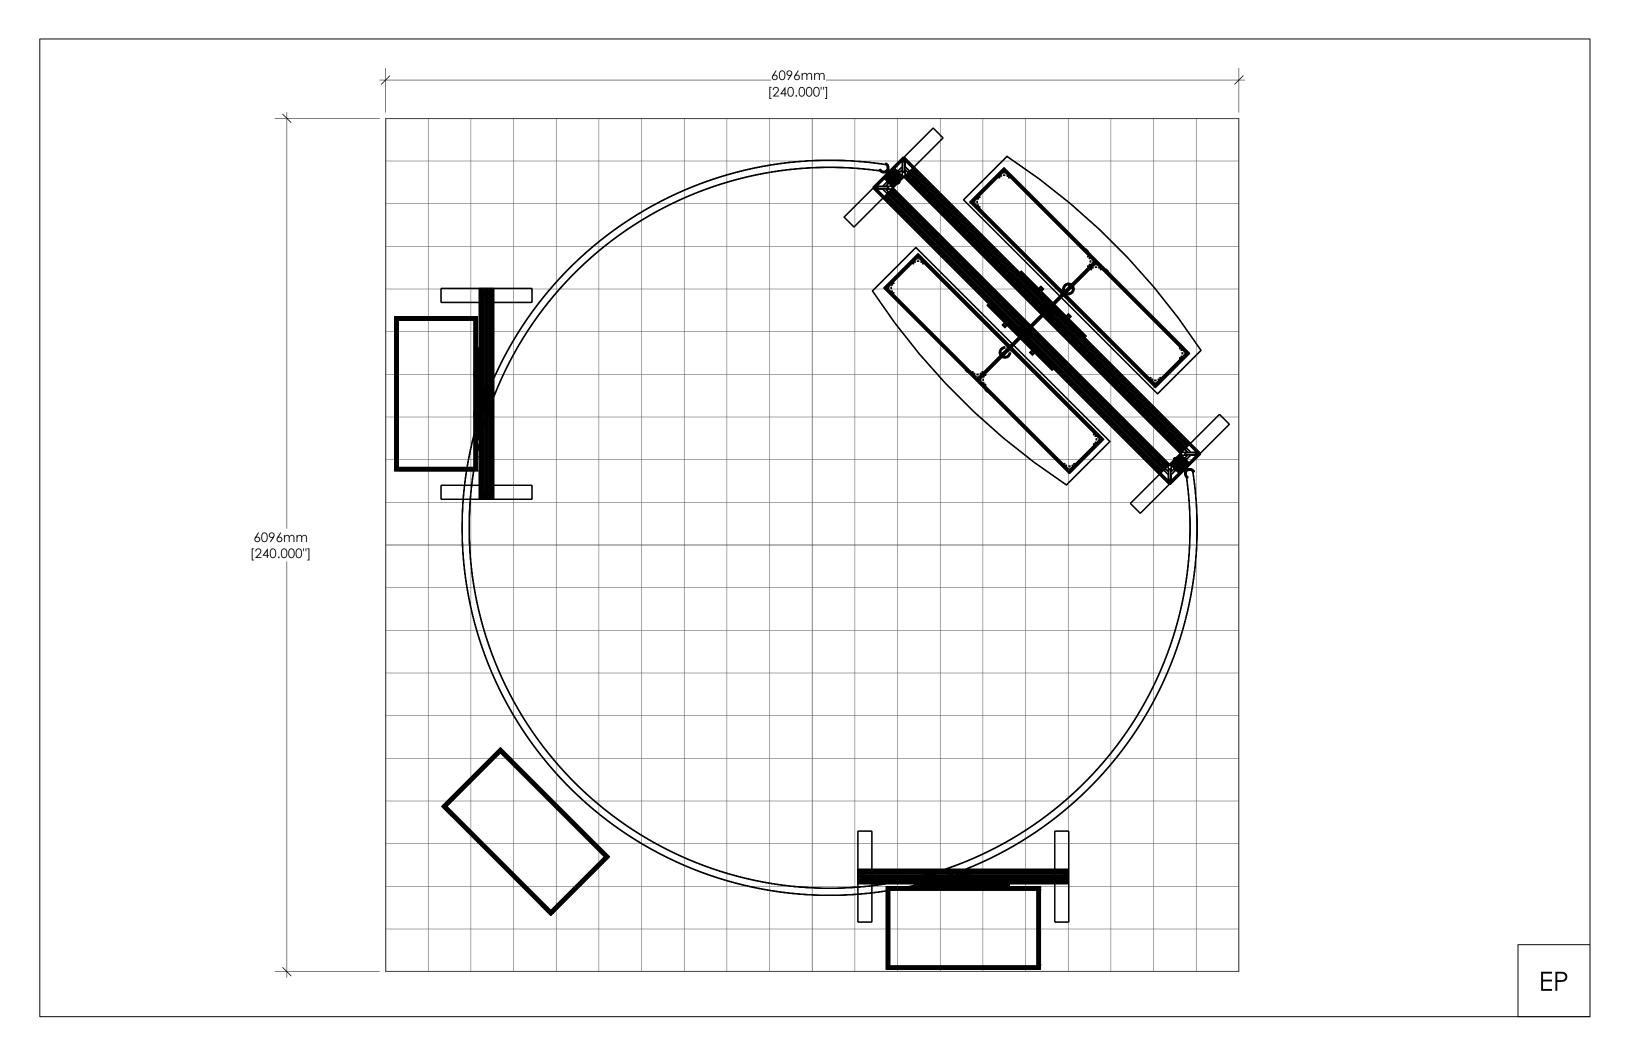


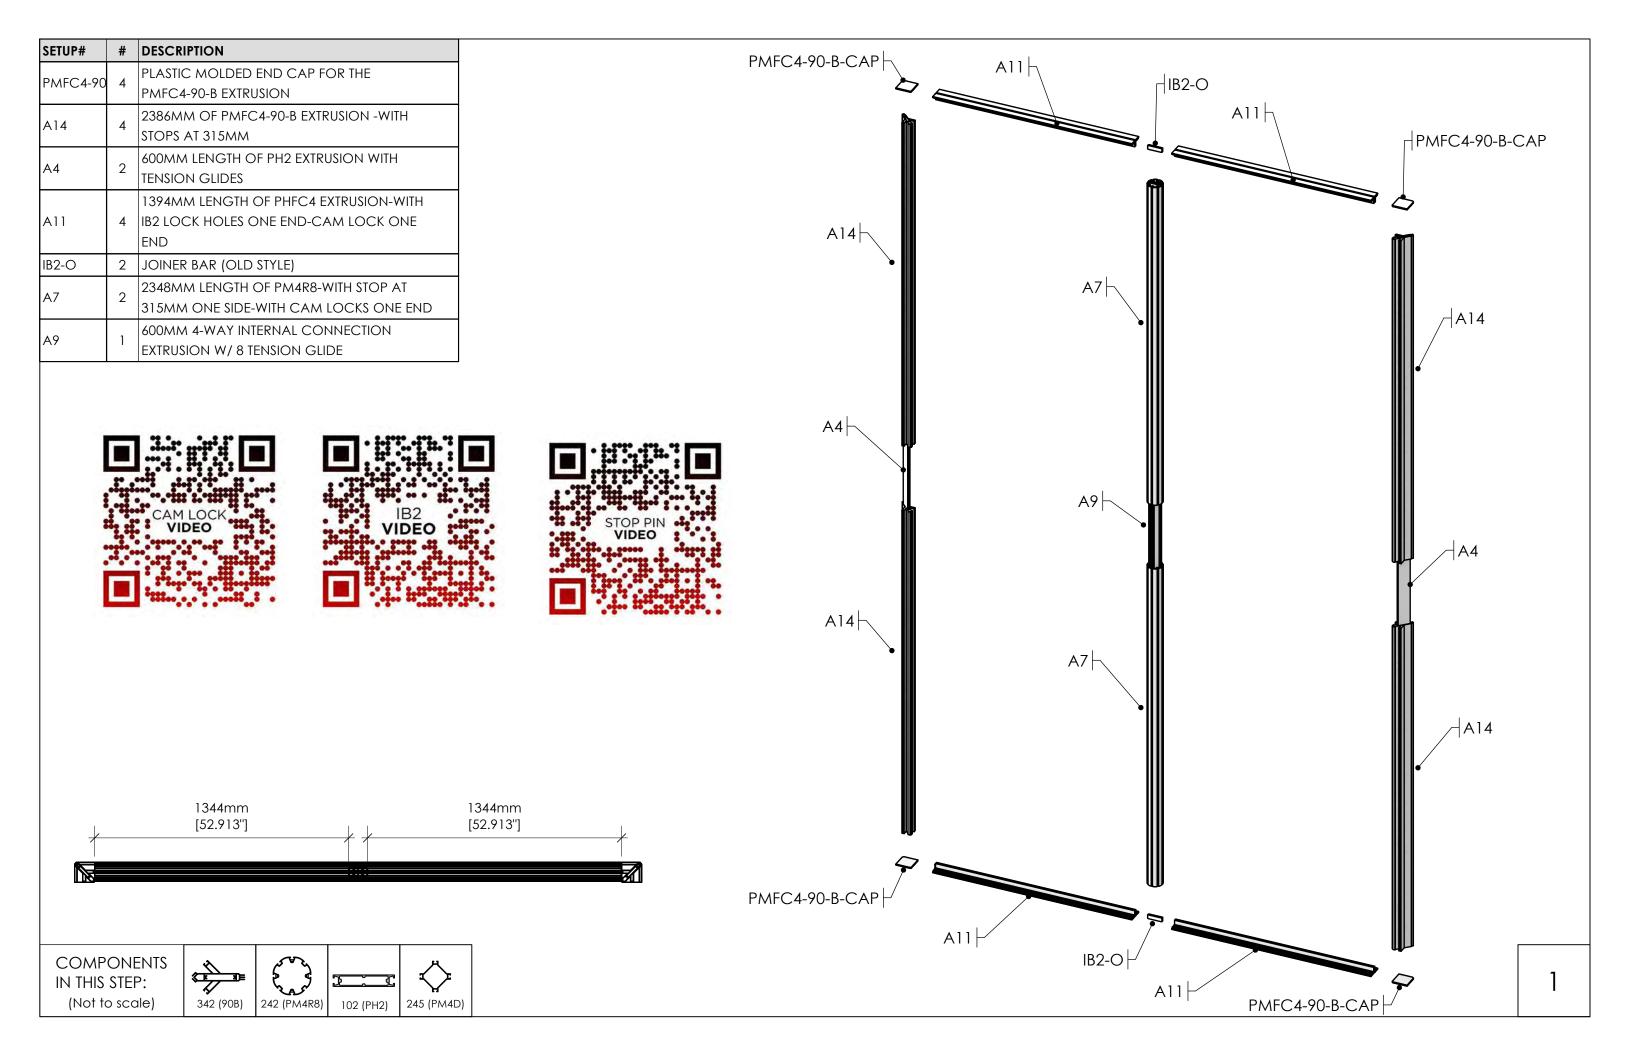


SETUP#	#	DESCRIPTION
A10	4	100MM LENGTH OF PHFC4 EXTRUSION-WITH
χ10	4	CAM LOCKS BOTH ENDS
A6	2	2310MM LENGTH OF PM4R8-WITH CAM LOCKS
ζ0		BOTH ENDS
A1	4	100MM LENGTH OF PH2 EXTRUSION-WITH CAM
Κ Ι	4	LOCKS BOTH ENDS
A2	3	111MM LENGTH OF PH2 EXTRUSION-WITH CAM
A2 3		LOCKS BOTH ENDS
A5	2	600MM LENGTH OF PM4R8-WITH CAM LOCKS
Λ3	_	BOTH ENDS








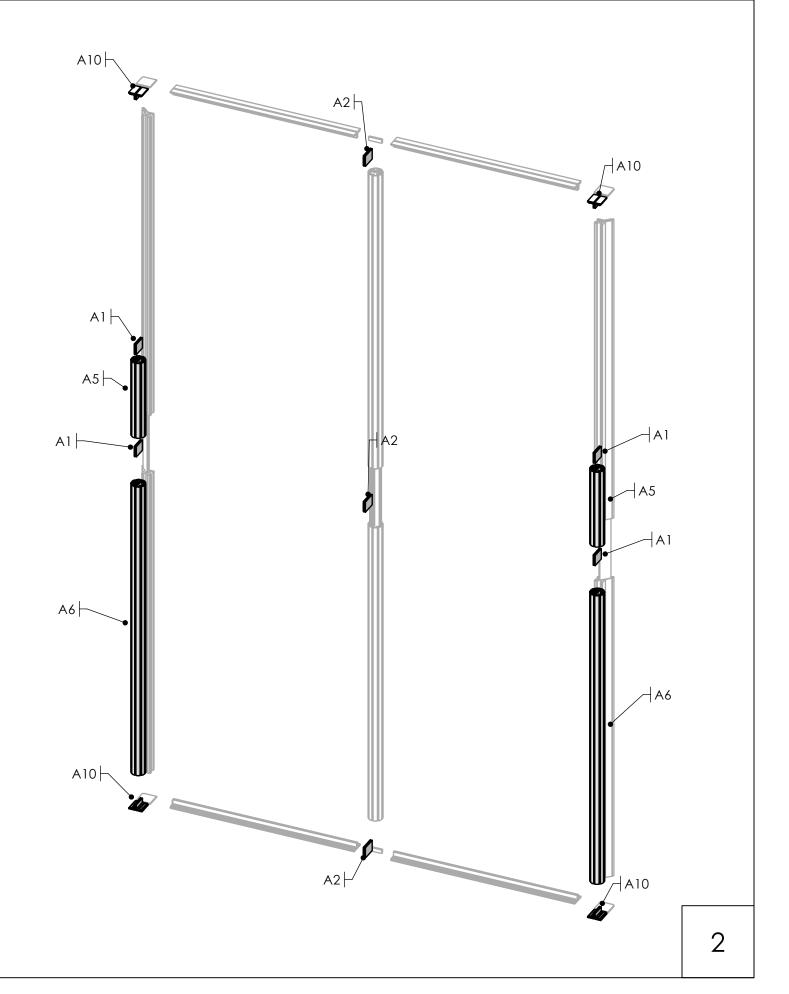


COMPONENTS
IN THIS STEP:
(Not to scale)





102 (PH2)

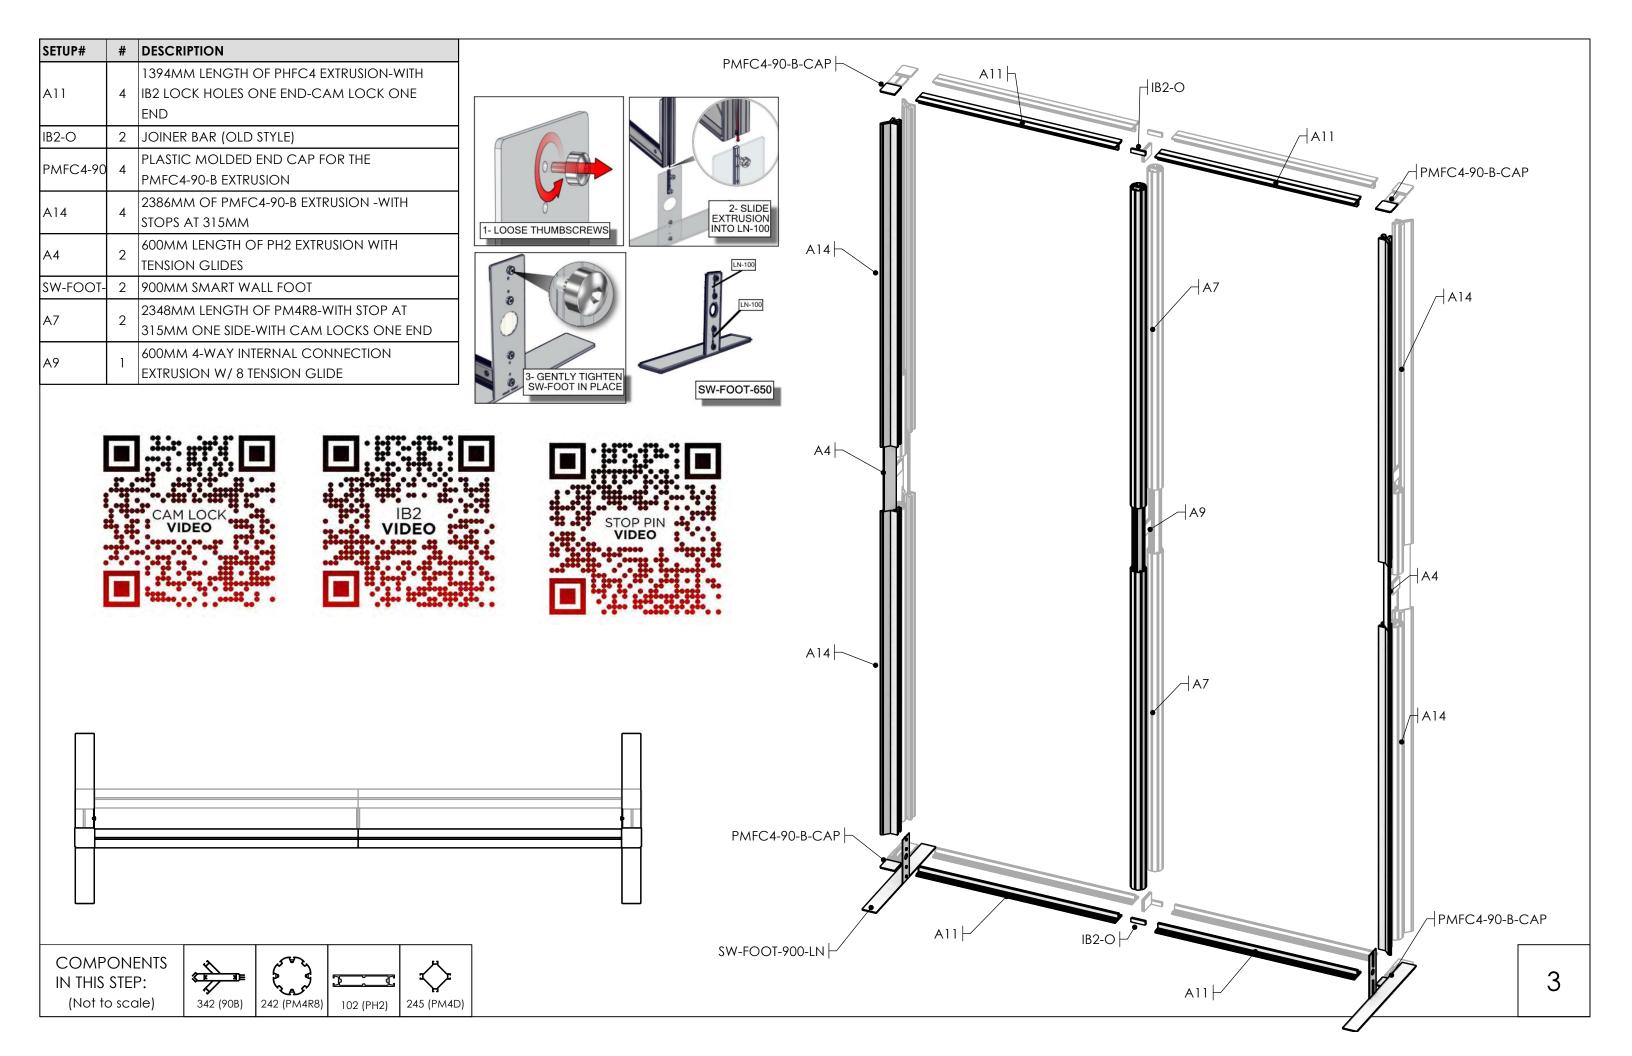



SETUP#	#	DESCRIPTION		
GR-A2	1	GRAPHIC (A2) (15.85 w X 192.27 h total size) 11.85 w X 188.27 h finish size, Dye-sub print on Eclipse Blockout Stretch, single sided, sewn with FCE-2 silicone beading around perimeter & pull tab in bottom right corner		GR-A4 GR-A1
GR-A1	1	GRAPHIC (A1) (121.68 w X 192.27 h total size) 117.68 w X 188.27 h finish size, Dye-sub print on Eclipse Blockout Stretch, single sided, sewn with FCE-2 silicone beading around perimeter & pull tab in bottom right corner (-WITH CUTS FOR PH2)	PUSH-FIT FABRIC VIDEO	GR-A2
GR-A4	1	GRAPHIC (A4) (15.85 w X 192.27 h total size) 11.85 w X 188.27 h finish size, Dye-sub print on Eclipse Blockout Stretch, single sided, sewn with FCE-2 silicone beading around perimeter & pull tab in bottom right corner		
GR-A3	1	GRAPHIC (A3) (121.68 w X 192.27 h total size) 117.68 w X 188.27 h finish size, Dye-sub print on Eclipse Blockout Stretch, single sided, sewn with FCE-2 silicone beading around perimeter & pull tab in bottom right corner		
				4

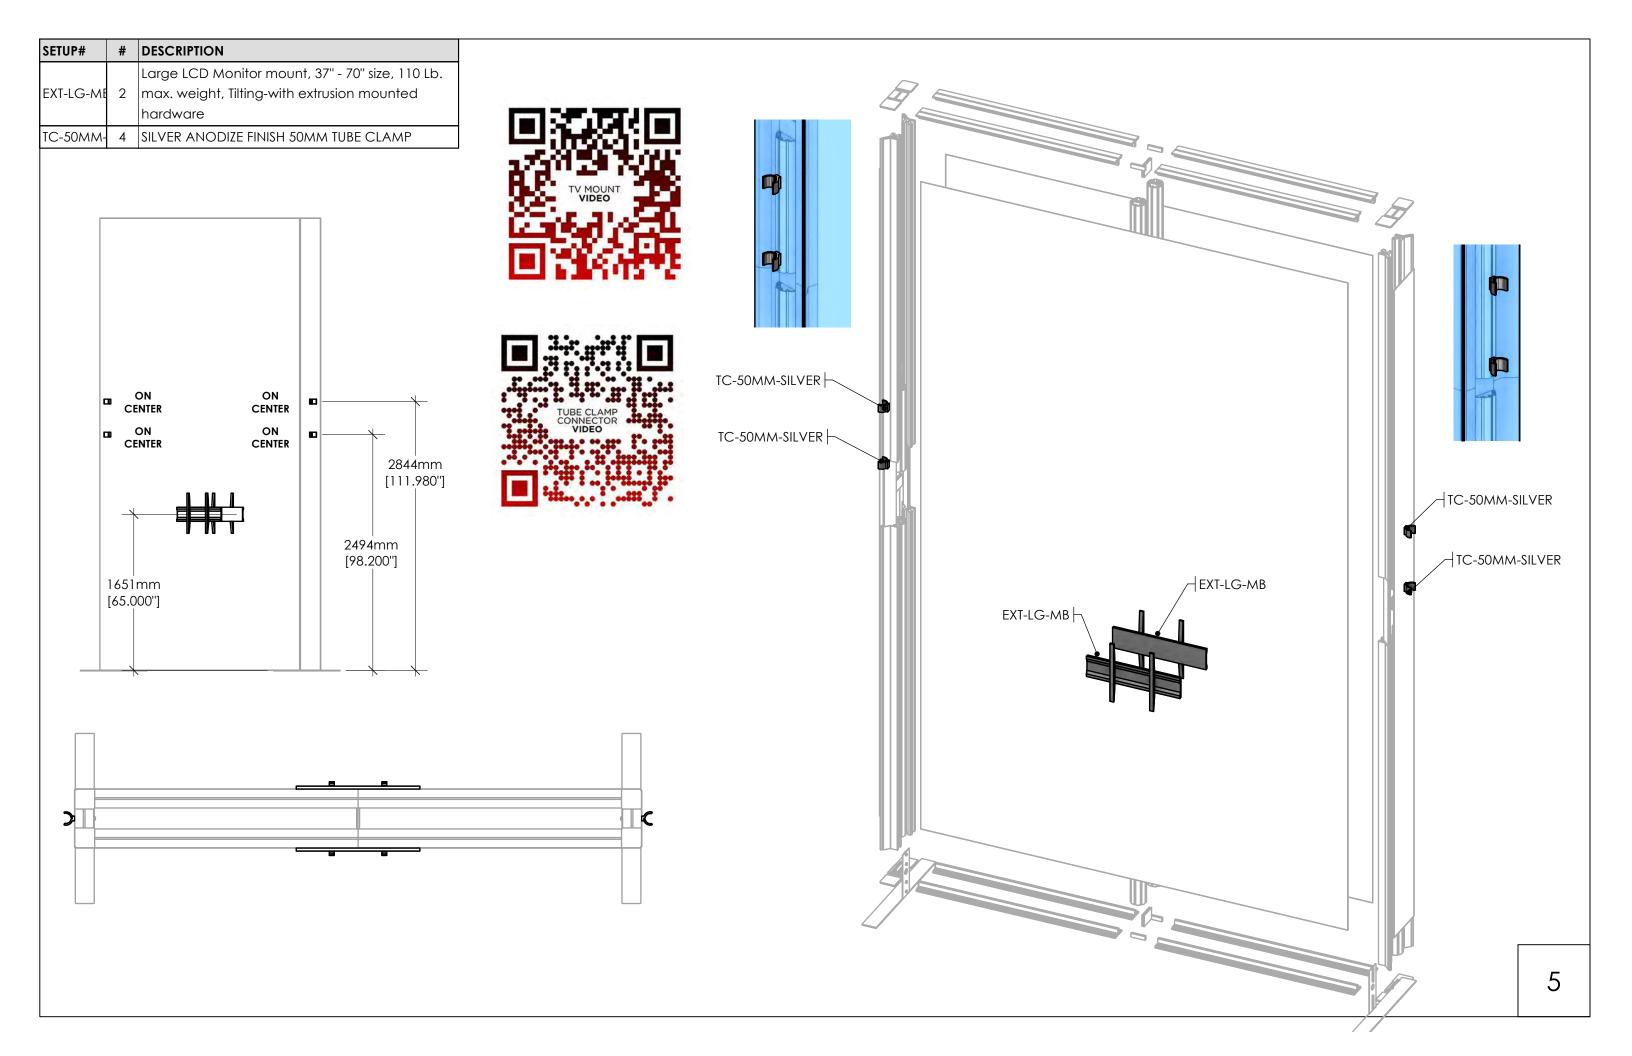

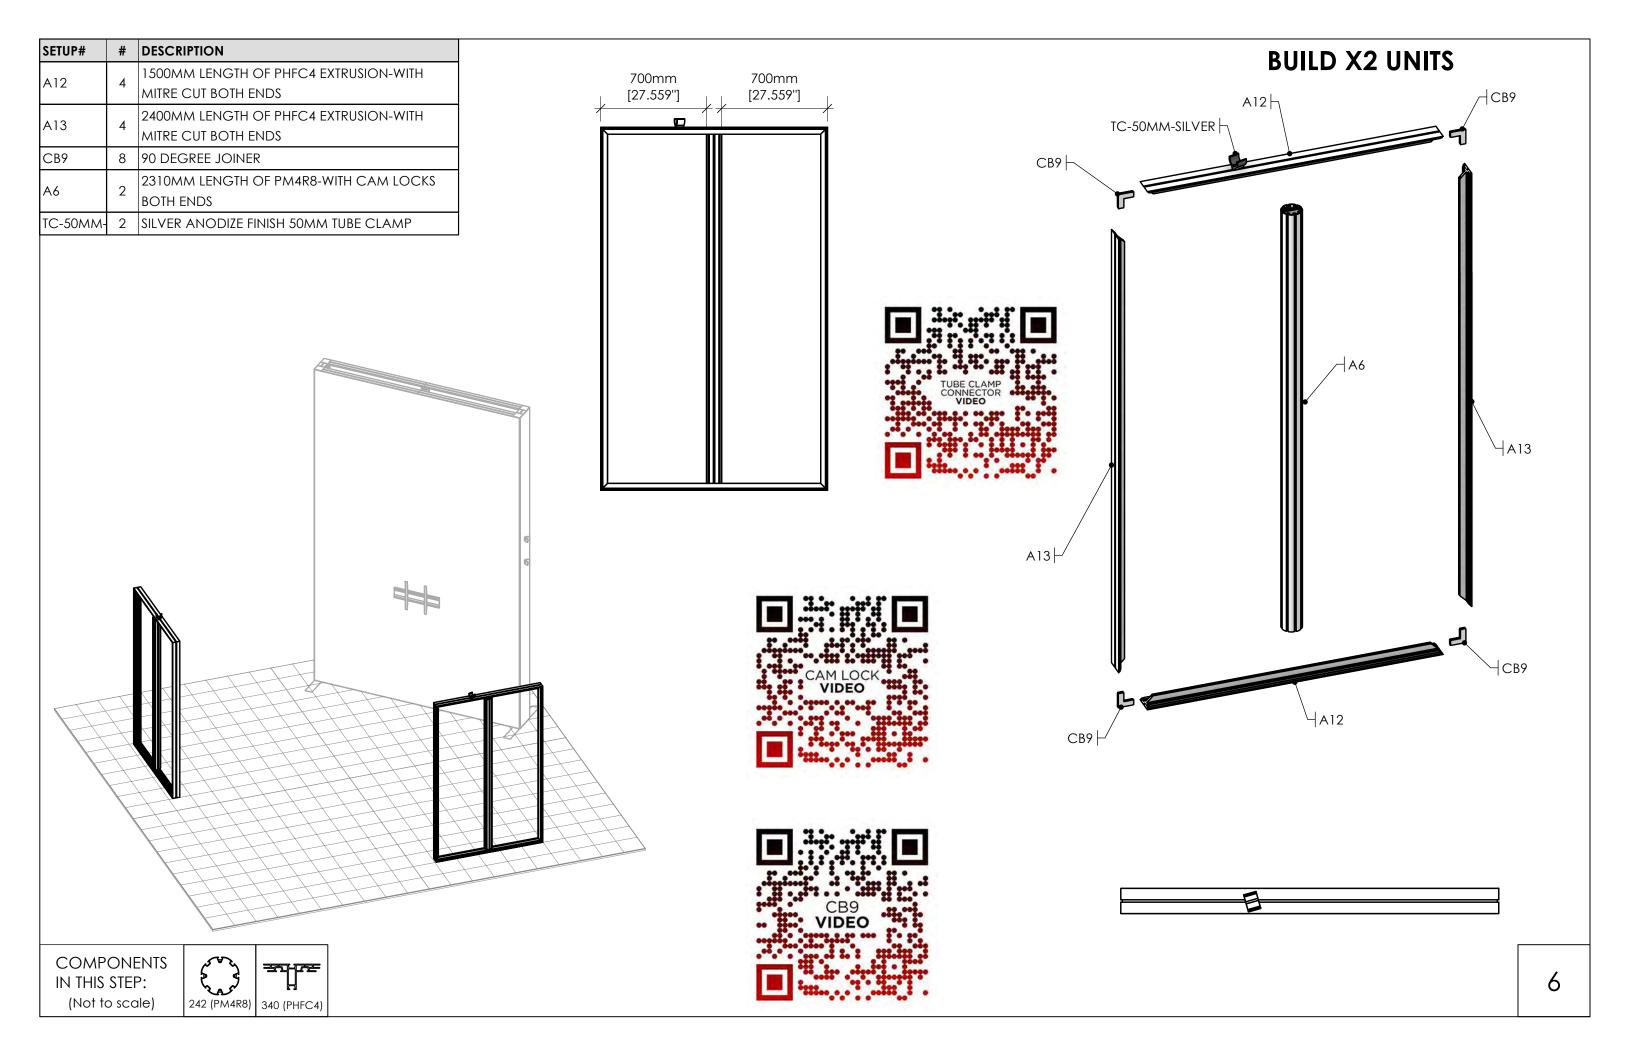


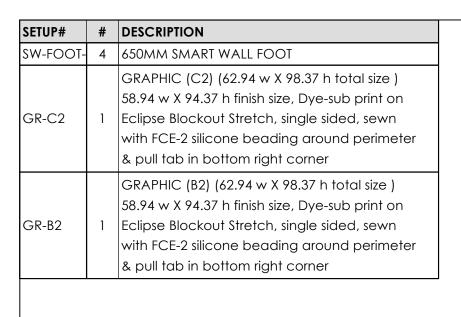

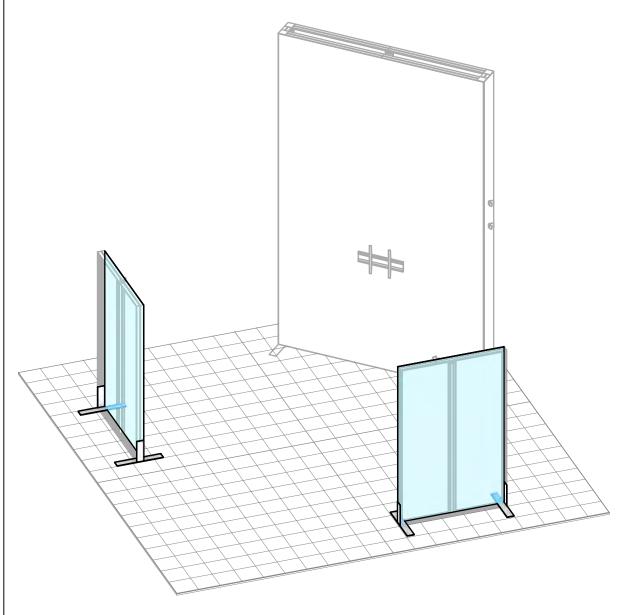

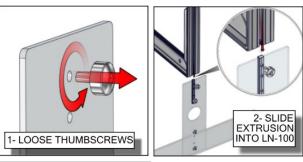







SW-FOOT-650-LN






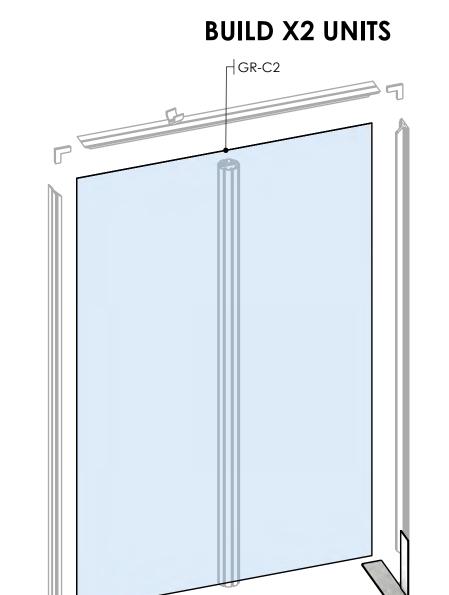

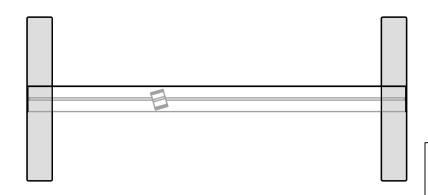

SW-FOOT-650-LN

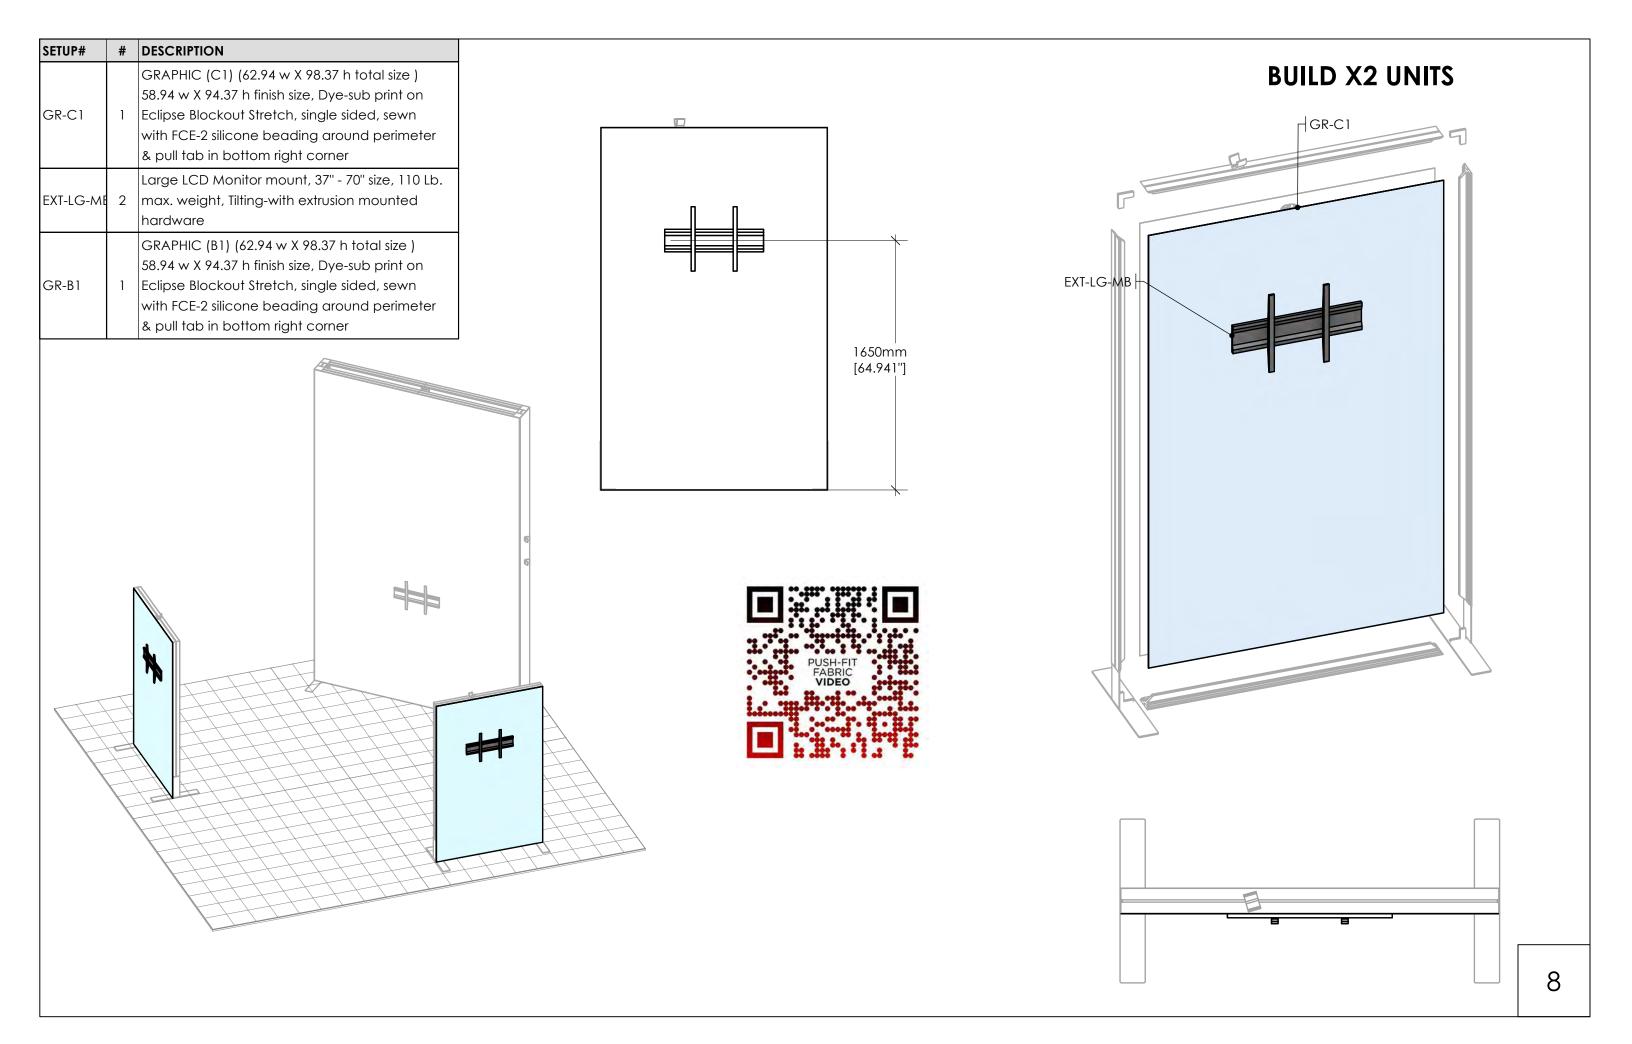

SET UP INSTRUCTIONS:


- 1. CONNECT BOTTOM AND TOP TUBES FOLLOWING THE LABELS
- 2. CONNECT SIDE TUBES
- 3. CLEAN THE FRAME AND PLACE THEM ON CLEAN PLACE
- 4. CAREFULLY REMOVE FABRIC COVER FROM BAG
- 5. PLACE COVER AROUND THE BOTTOM OF THE FRAME
- 6. PULL COVER CAREFULLY UP TO THE TOP
- 7. CLOSE ALL ZIPPERS
- 8. ADJUST FABRIC AROUND THE FRAME
- 9. CONNECT CABLE HARNESS TO THE EYEBOLTS
- 10. COMPLETELY TIGHTEN THREADED CONNECTORS


BREAK DOWN INSTRUCTIONS:

REVERSE SET-UP STEPS TO BREAKDOWN FRAME


FABRIC CARE INSTRUCTIONS:


- 1. UNZIP COVER ZIPPERS
- 2. CAREFULLY REMOVE FABRIC COVER
- 3. CLOSE ALL ZIPPERS
- 4. FOLD OR ROLL NEATLY
- 5. PLACE FABRIC IN COVER BAG

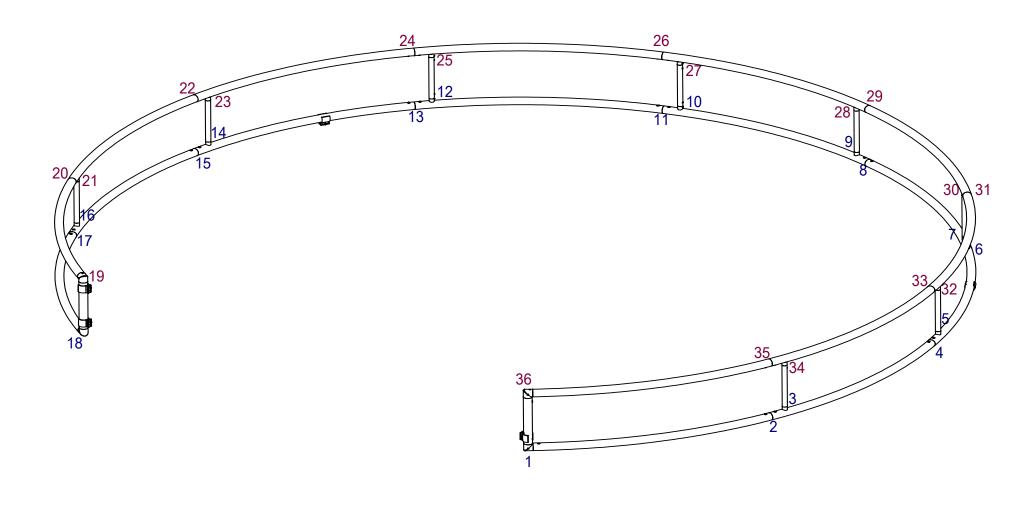

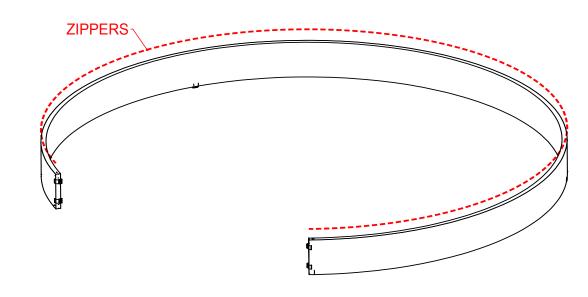







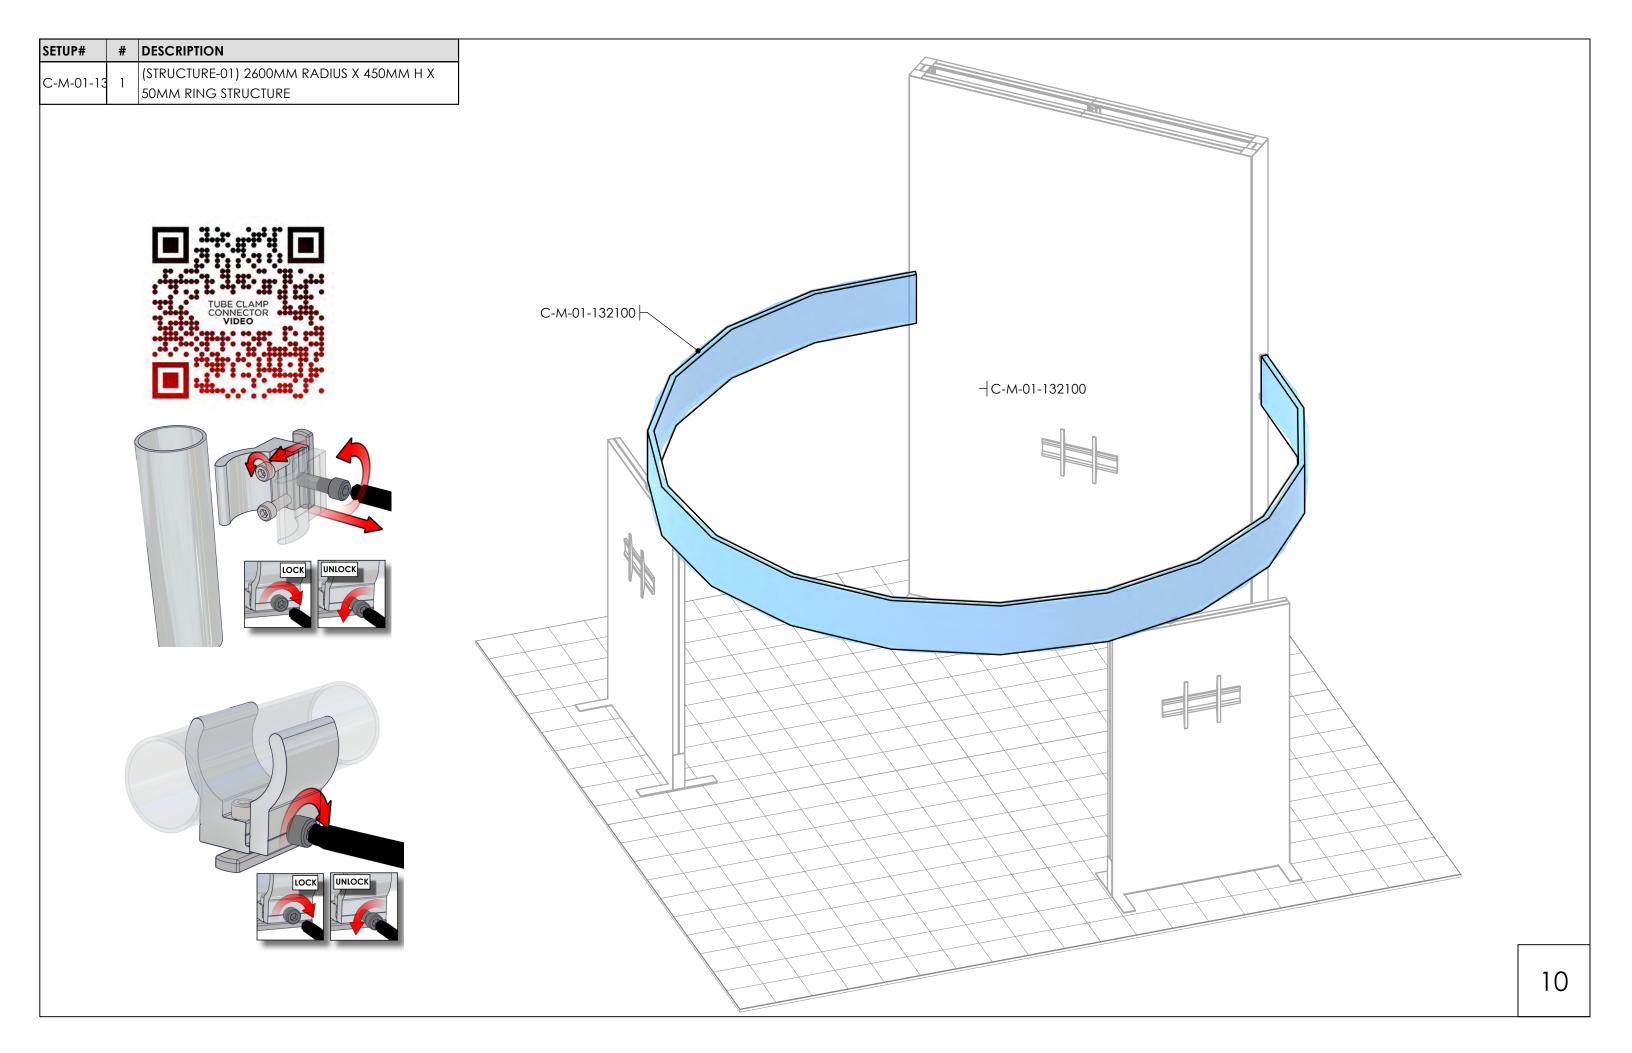


SETUP#	#	DESCRIPTION
A15	4	300MM W X 1000MM H LOCK PANEL
A16	4	900MM W X 1000MM H LOCK PANEL
410-1000-4	4	1000MM LENGTH OF WHITE LAMINATED P90S EXTRUSION
419-1000	2	1000MM LENGTH OF PX EXTRUSION
A3	4	300MM LENGTH OF PH2 EXTRUSION-WITH CAM LOCKS BOTH ENDS
A1	4	100MM LENGTH OF PH2 EXTRUSION-WITH CAM LOCKS BOTH ENDS



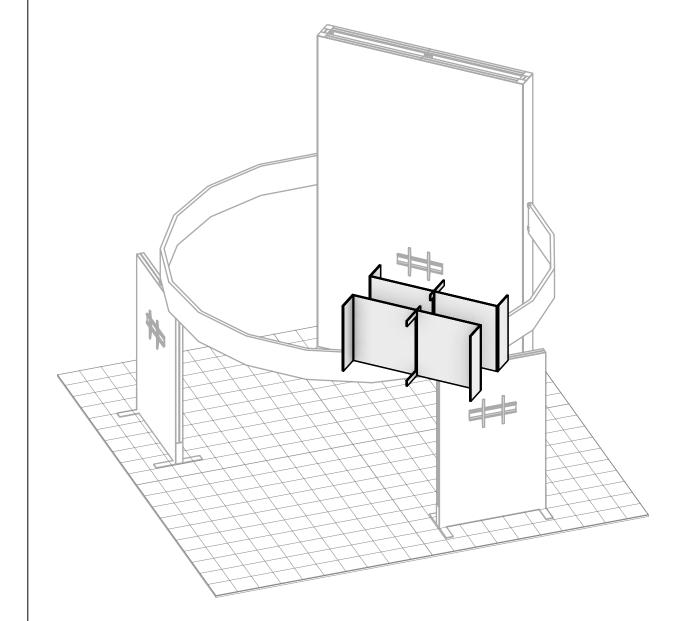

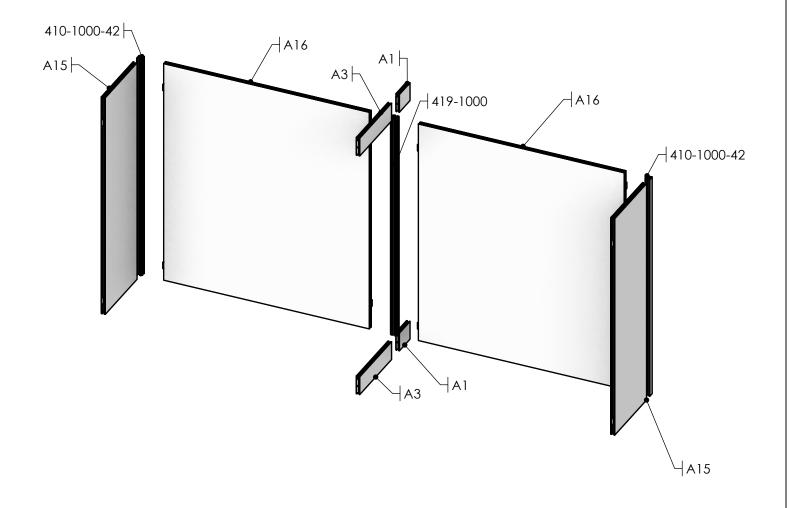

BUILD X2 UNITS

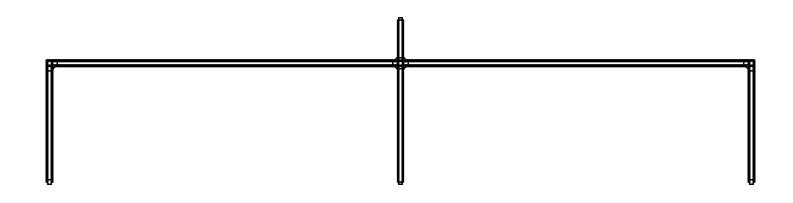


COMPONENTS
IN THIS STEP:
(Not to scale)










SETUP#	#	DESCRIPTION
A17	4	900MM W X 1000MM V LOCK PANEL CABINET
		1000MM LENGTH OF WHITE LAMINATED PT
418-1000-4	2	EXTRUSION
410-1000-4	4	1000MM LENGTH OF WHITE LAMINATED P90S
		EXTRUSION





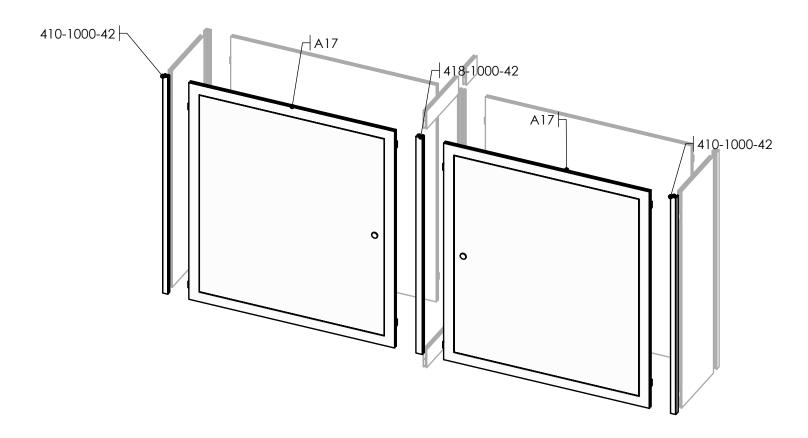

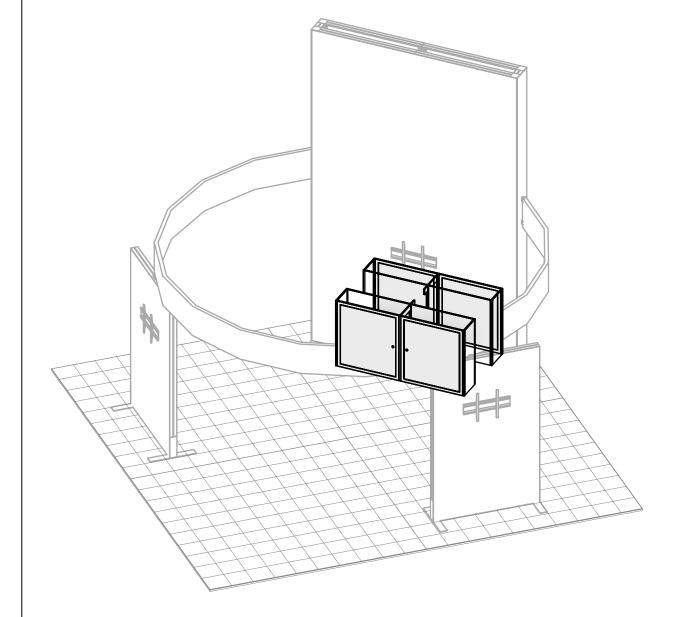

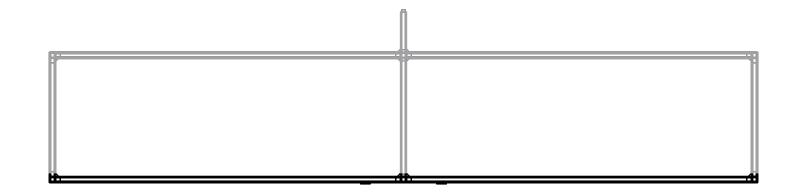



COMPONENTS
IN THIS STEP:
(Not to scale)







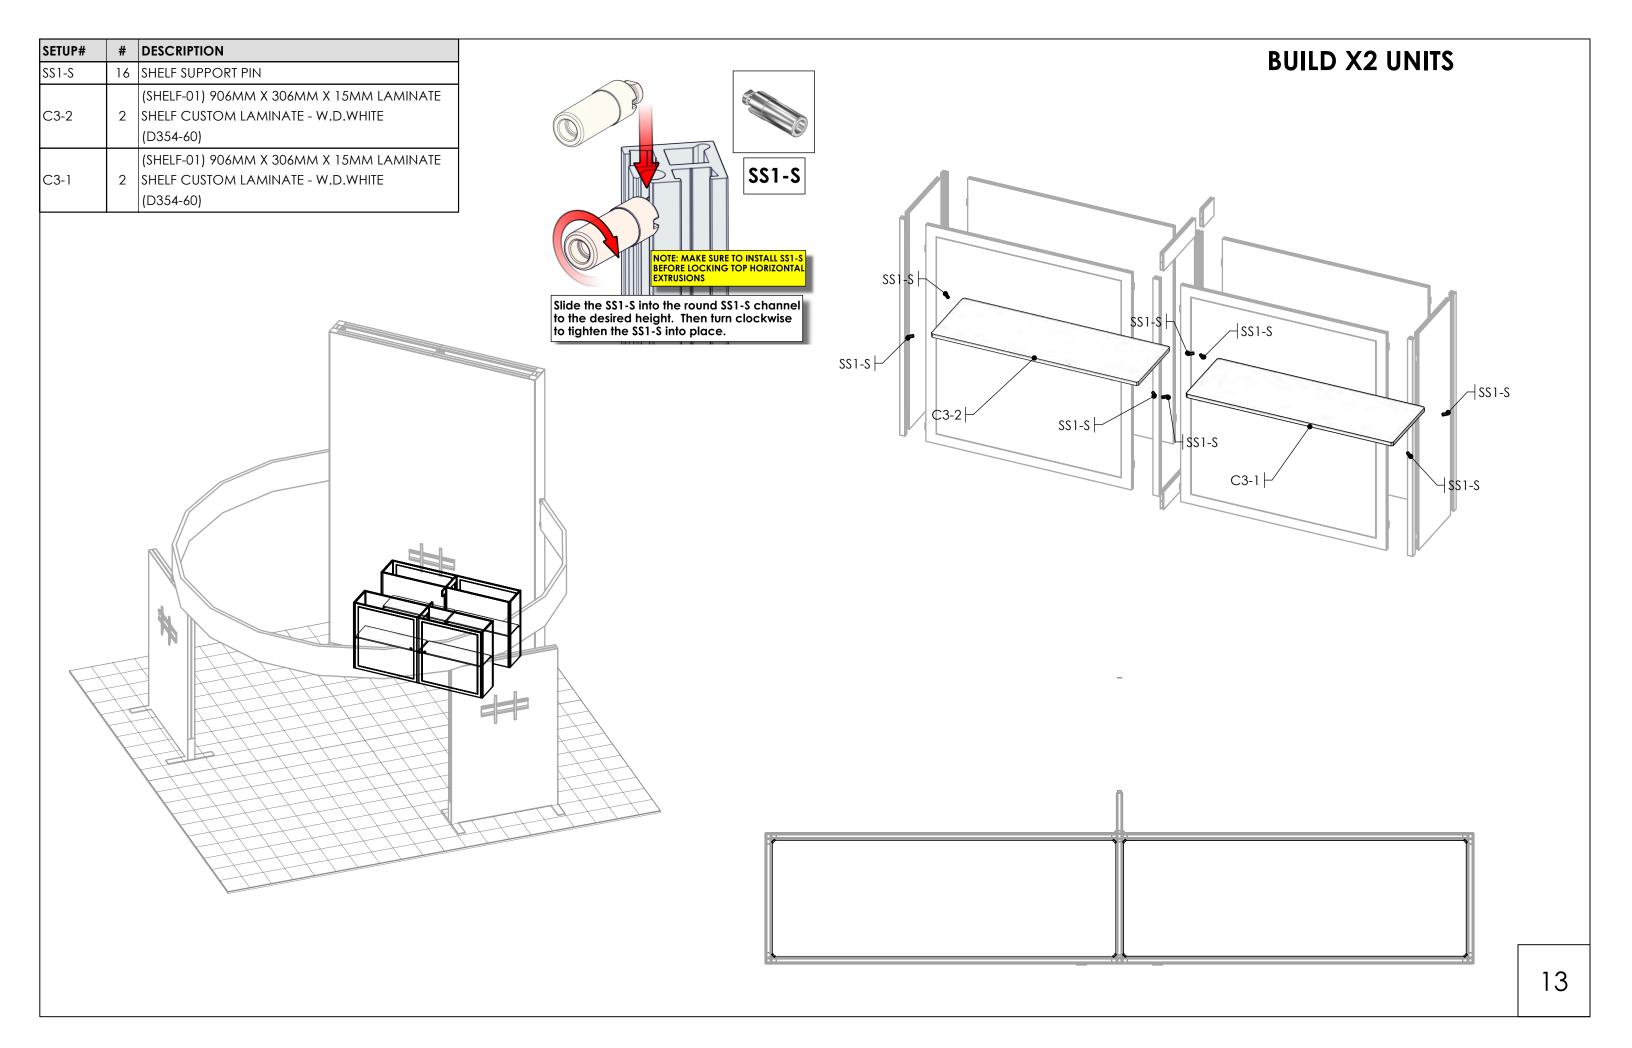

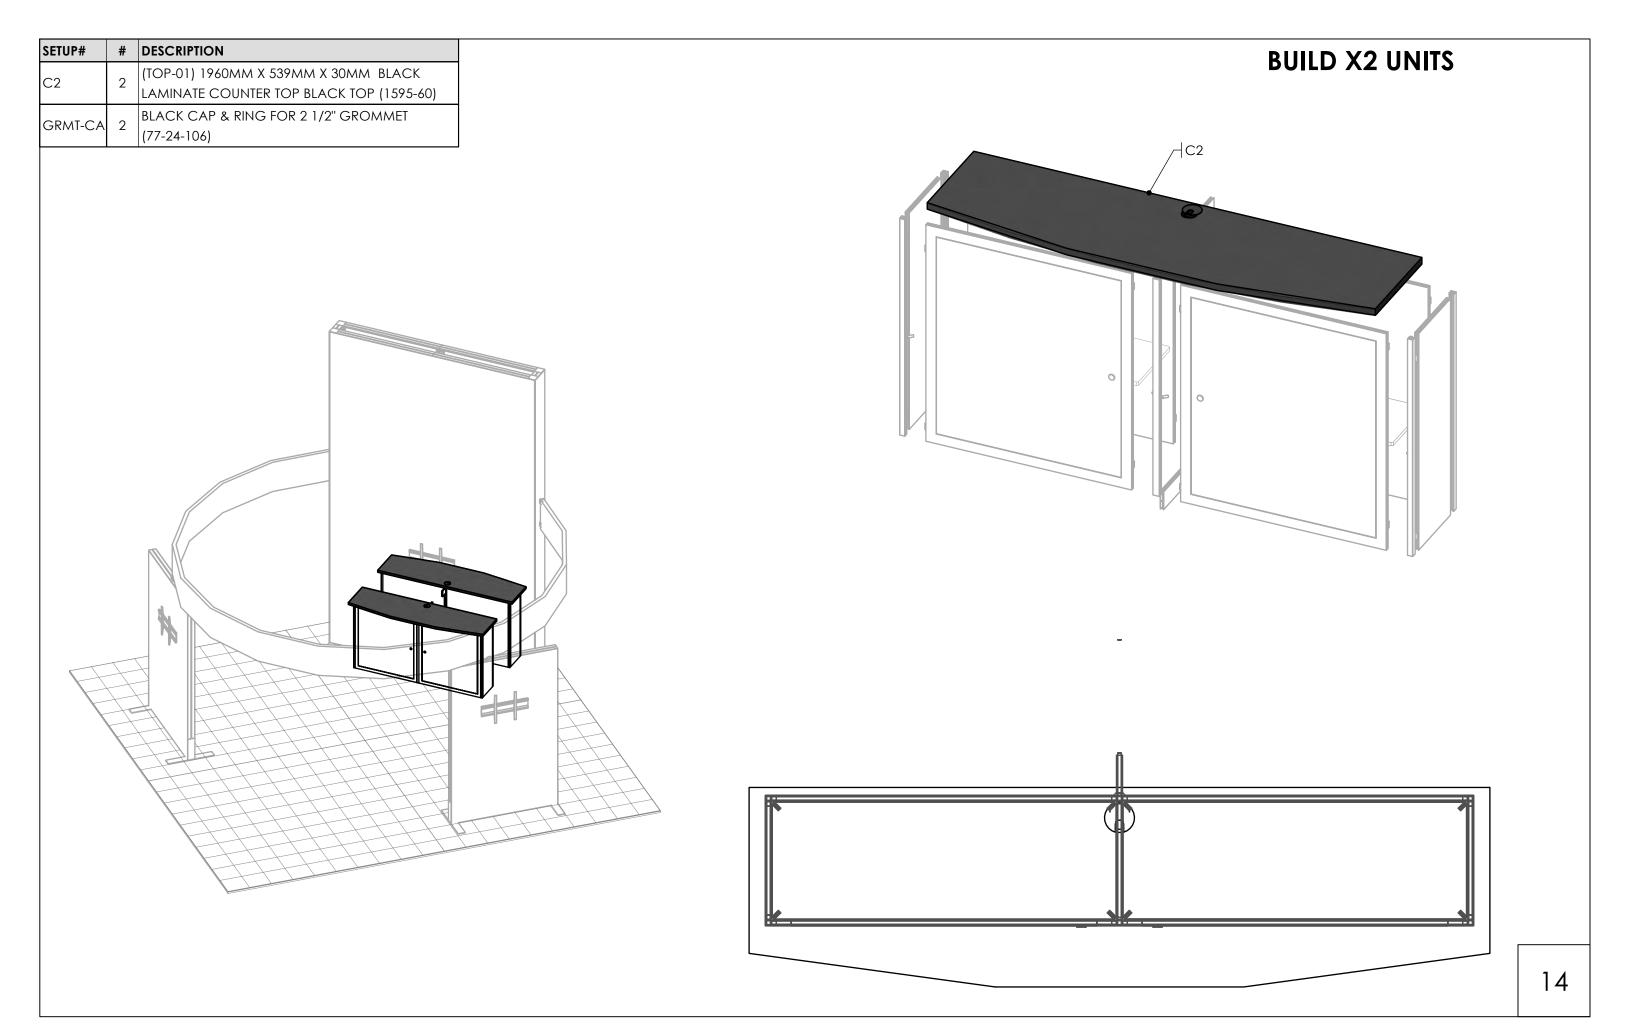

SETUP#	#	DESCRIPTION
C1-2	6	LEG
C1-1	3	COUNTER TOP

BUILD X3 UNITS

