


JOLLY BAR BACKLIT COUNTER

SET UP INSTRUCTIONS

PARTS GUIDE


Please remove all parts from the boxes and review them. Contact your service representative if there are any missing parts



F. Edge Lights Qty.8 (w /transformer)



E. Dual Torx Key



D. Acrylic Countertop Qty.3



A. 40" Extrusions - Qty.4



B. 22" Extrusions - Qty.4




C. 72" Extrusions Qty.4

GRAPHIC MOUNTING GUIDE

Step 1

Locate the silicone beading on the back side perimeter of the graphic. Insert the corners of the graphics into troughs of the frame to begin graphic installation. Press the silicone beading into the trough of the frame and work your way around the entire perimeter for each side.



Step 2


Repeat the same process for the other 3 graphics until all 4 are installed. Place the acrylic counter top on to the top of the frame. Make sure the alignment squares under the acrylic counter top are backed into each corner.



JOLLY BAR BACKLIT COUNTER


STEP 1

Start by building both vertical sides.

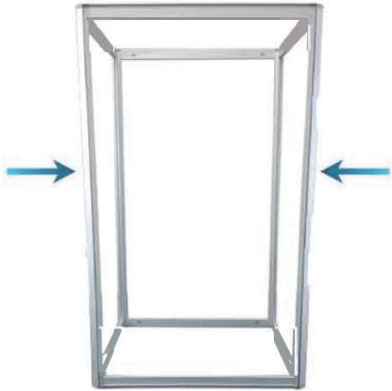

STEP 2

Take (1) 40" extrusion and (1) 22" extrusion and connect them. Lock the 22" extrusion by tightening the exposed Torx head with the supplied Torx key.

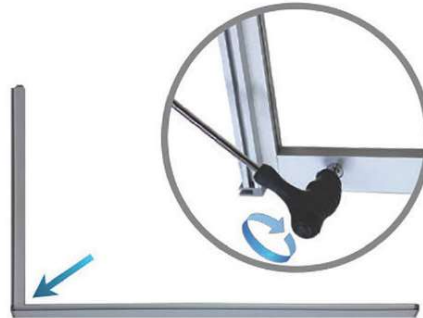

STEP 3

Continue until you have (1) complete perimeter, as shown above. Repeat the same process so that you have (2) of these completed.




STEP 4

Take (1) side and attach the remaining 22" extrusions.



STEP 5

Once you have the remaining 22" extrusions locked in place (shown below), you are now ready to place the 2nd side that was completed in Step 3 on top.

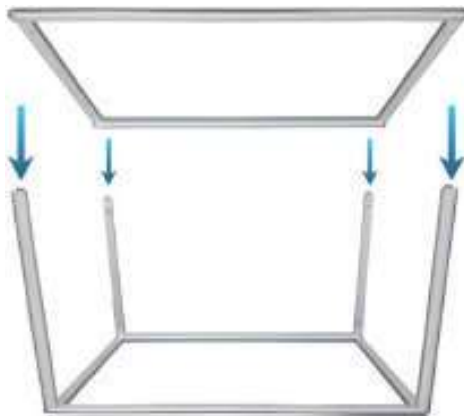



STEP 6

Tighten/lock the top and rotate the frame on to its vertical side (shown below). The frame is ready to have the graphics and acrylic counter installed.




BACK LIT INSTRUCTIONS


(Big Sky Counter 4x2 shown below)

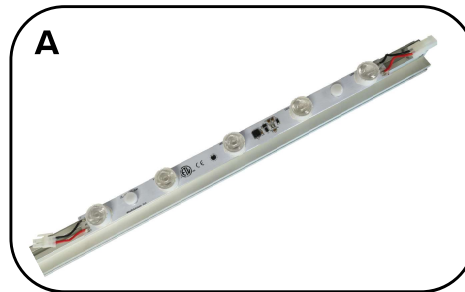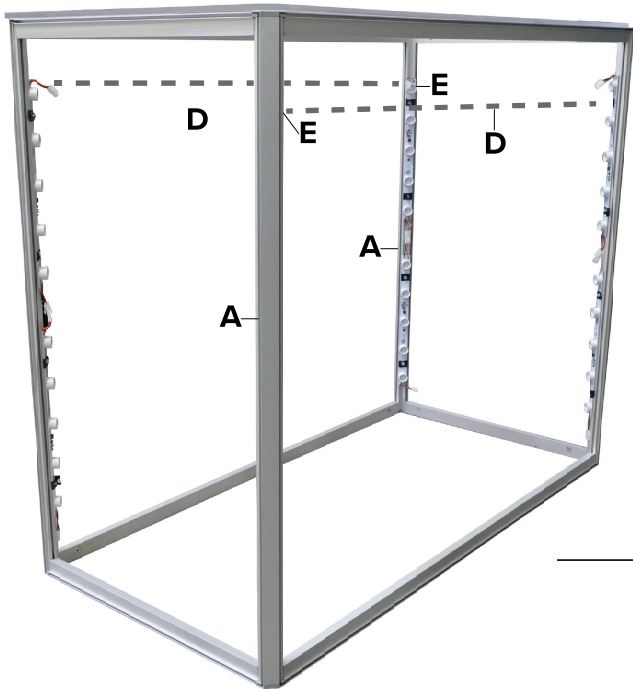

Lights come pre-installed onto extrusions. Be sure to match numbered ends (EX: 1:1, 2:2,3:3,etc.) on each extrusion.

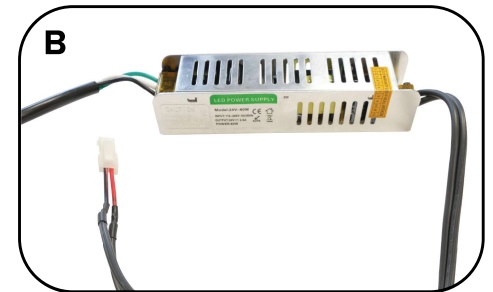

Locate the supplied transformer. DO NOT TAMPER with any of the wiring or settings.

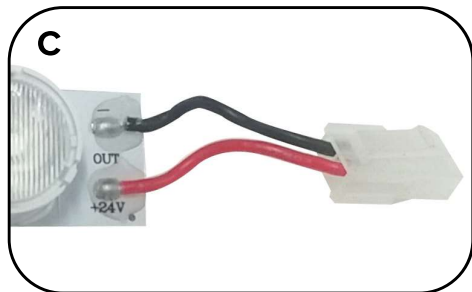

Locate the initial female connector (OUT) and connect the transformer. Keep the power cord unplugged until all connections are complete.



Locate the supplied cables to link the light strips together. Reference the diagram above to complete all connections.



Reference the diagram above to plug in the male/female connectors (IN/OUT) and complete all connections. Plug in the transformer to turn the lights on.

INSTALLATION LED LIGHTS STEPS

1




Locate the silicone edge beading on the back perimeter of the graphic.

2




Insert the beading into the channel, starting with the top left corner.

3

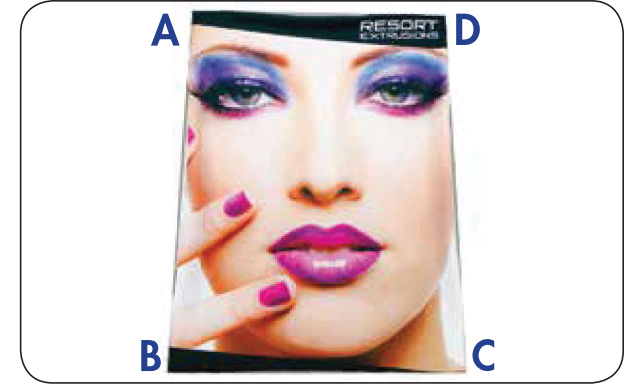


Continue to insert each corner, counter-clockwise around the frame.

4

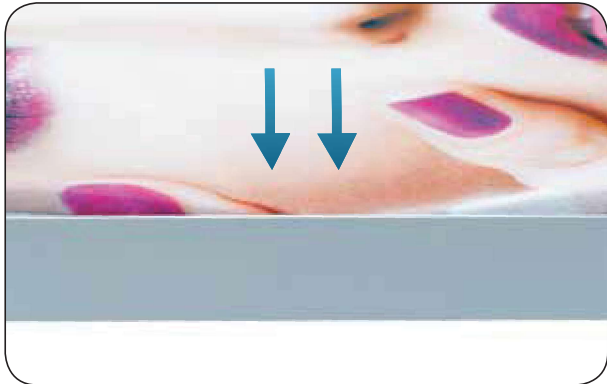


Once all corners are in, push in the remaining beading starting in the middle of each side.

5

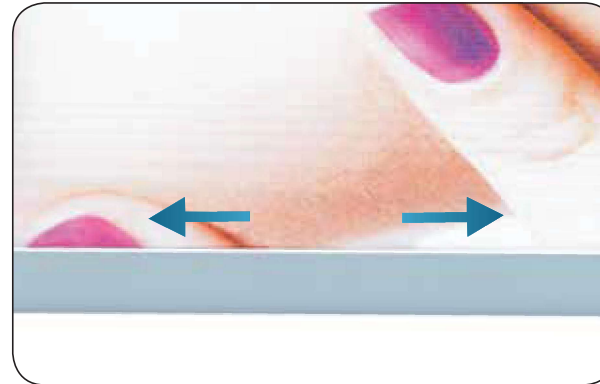

Continue to insert the beading into the channel by pushing down and then outwards.

6

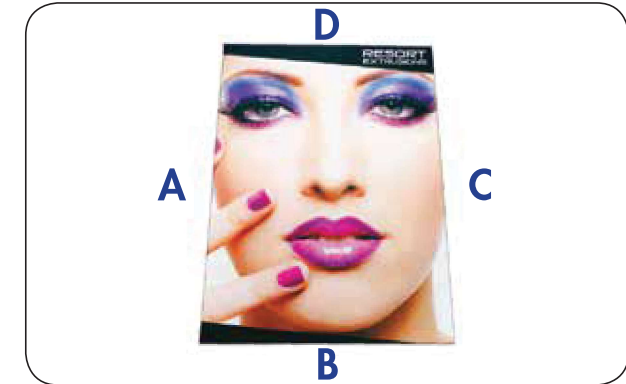

Continue until you have completely inserted the beading around the entire perimeter.