
# SEGO CONFIGURATION B

PRODUCT CODE: SEGOB





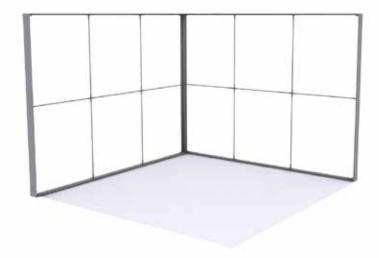

### **PRODUCT DESCRIPTION**

The advanced technology of the new SEGO modular lightbox system combines innovation with intuition. Toolless down to its feet, SEGO is designed to help heighten your display experience. Magnetic electrical connectors light up the UL certified LED lights that come pre-installed in the profiles. Electrical wires stay hidden from view. Edge-to-edge customizable SEG backlit fabric graphics cover the front and back of the aluminum frame. Portable, configurable, desirable, SEGO is a lightbox unlike the others. SEGO is so well thought out, even its durable foam cut carry bag is made distinctly to keep all parts and pieces protected and organized.

DISPLAY DIMENSIONS 236	6"W x 88.25"H x 16.5"D
------------------------	------------------------

GRAPHIC SIZE 118.625"W x 88.625"H (each graphic)

**GRAPHIC MATERIAL** 

Dye Sub Backlit Fabric

**GRAPHIC FINISHING** 

Silicone beading sewn onto edge of graphic

#### **DISPLAY CONSTRUCTION**

Aluminum extrusion frame with plastic components

SHIPPING WEIGHTS & DIMENSIONS

Shipping Weight 55 lbs (frame only) (per box) 60 lbs (frame & graphic) (per box)

Shipping Dimensions 54.5"W x 15.5"H x 6.75"D (x4)


### GRAPHIC TURN AROUND TIME

**3** business days after proof approval (up to 2 cofigurations)


#### AVAILABILITY CA


LED LIGHT SPECIFICATION		LUMENS (EACH FRAME)	
BRAND	Osram	VOLTAGE (V)	24
POWER	3W	POWER (W)	270
CCT (COLOR TEMP)	6800k	LM/W	130
AVERAGE BEAM ANGEL	20 °	TOTAL LM	35100
LM/W	130	AVG LM	5850
AVG LM/M <sup>2</sup>	4800-5800	CU	.8
VOLTAGE INPUT	24V	EAV	4680
TRANSFORMER SPECIFICATION			
POWER RATE 2	95W, 252W		
TRANSFORMERS			
CERTIFICATES	UL, CE, GEM		
VOLTAGE INPUT	100-240V		
VOLTAGE OUTPUT	24V		







# PARTS LIST






# SET UP INSTRUCTIONS SEGO 300X225 FRAME ASSEMBLY

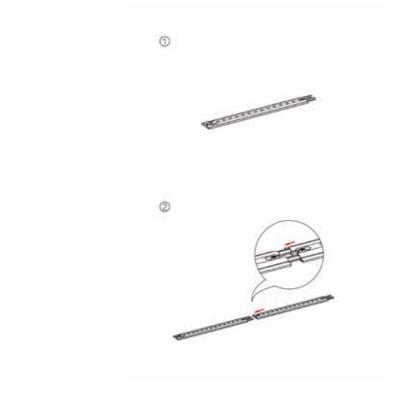


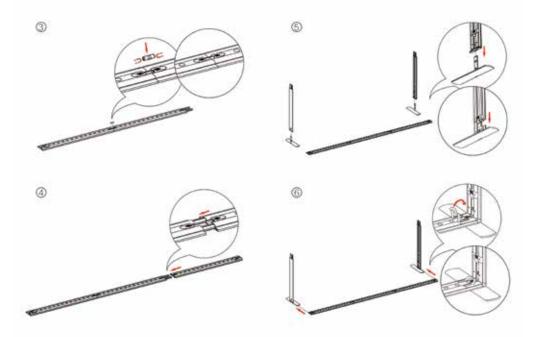

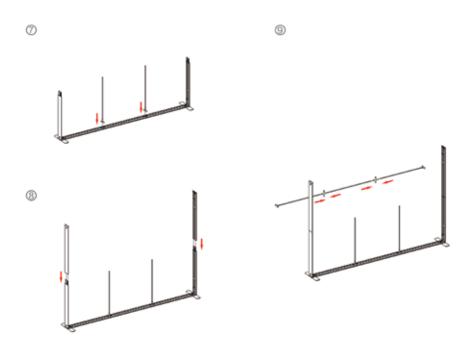



0


0





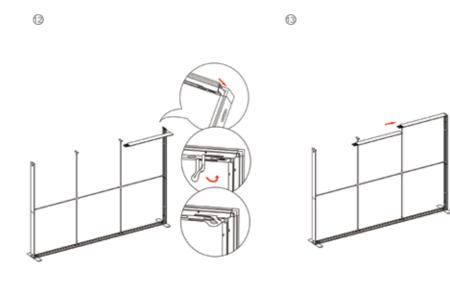


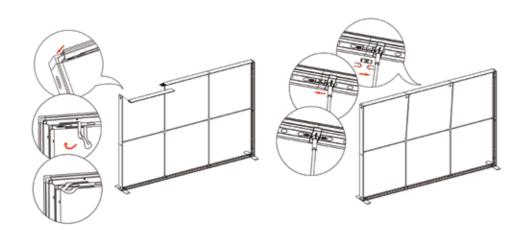

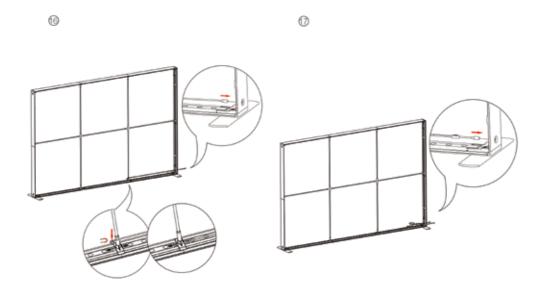



19

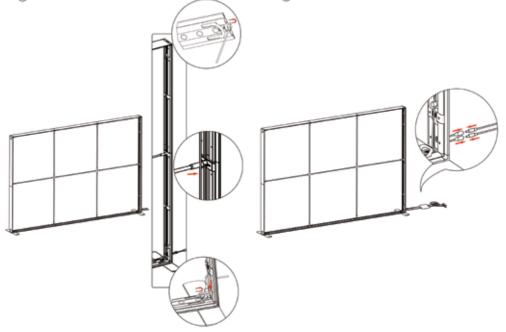

### FRAME CONNECTION

