# 10FT X 7.5FT LUMIÈRE LIGHT WALL®

PRODUCT CODE: LLW4X3

















**Graphic Endcaps (Optional)** 



Frame



Channel Bars on Frame



Ladder Lights

### PRODUCT DESCRIPTION

Illuminate your message with the Lumiere Light Wall®! Lumiere ladder lights make backlit graphics pop on this innovative combo display of silicone-edge graphics and portable RPL fabric pop ups. Plus, the Lumiere shrinks down in size: simply collapse the geometric frame and the SEG bungeed channel bars, and fold or roll the fabrics graphics. Setup requires 1 person and 5-10 minutes. SEG portability is easy and stylish.

DISPLAY DIMENSION	117.75 " W x 88.75" H x 14.5" D
-------------------	---------------------------------

#### **GRAPHIC DIMENSIONS**

MAIN GRAPHIC 118.5" W x 89" H END CAP GRAPHIC 14.25" W x 89" H

#### **GRAPHIC MATERIAL**

UV Backlit Fabric

#### **GRAPHIC FINISHING**

Silicone beading is sewn around the perimeter of the fabric graphic. Silicone beading is hidden from view once installed.

#### **DISPLAY CONSTRUCTION**

Aluminum Frame

## LADDER LIGHTS SPECIFICATION

EACH LIGHT BEAD | 1.0W ANGLE 170° OPERATING VOLTAGE DC12V/24V TOTAL WATTAGE | 420W TOTAL AMPERAGE | 18A

#### MODULAR LED CURTAIN 30W KIT 1X4

**POWER (W): 95** LM/ (W): 110 LM/ (W): 10450

### TRANSFORMER SPECIFICATION

OUTPUT 24V/3.75A INPUT AC100-240V/1.3A

### SHIPPING WEIGHTS & DIMENSIONS

Lumiere Ladder Lights - 4 Units

Shipping Weight 29 lbs **Shipping Dimensions** 14" L x 12.5" W x 32.5" H Lumiere Light Wall

Shipping Weight 31 lbs (frame only) 34 lbs (with graphics) Shipping Dimensions 34" L x 14" W x 9" H

#### LARGE QUANTITY FREIGHT

Lumiere Ladder Lights 30 boxes per 48" L x 40" W x 28.5" H skids Freight Shipping Freight Weight 168 lbs

Lumiere Light Wall

Freight Shipping 15 boxes per 48" L x 40" W x 48" H skids 372 lbs (frame only) 408 lbs (with graphics) Freight Weight

### **GRAPHIC TURN AROUND TIME**

2 business days after proof approval

AVAILABILITY CA and PA

# **AVAILABLE ACCESSORIES**



La Caja Case



Genie Counter Case



Stabilization Feet



**Straight Connector** 



L Link Connector



Internal Showcase



Lumiere Jumper Cable\*



Qty 1 - Pop Up Frame



Qty 4 - 3 Section Channel Bars



Qty 4 - 4 Section Channel Bars



Qty 4 - End Cap Channel Bars



Qty 1 - Carry Bag



Qty 1 - Channel Bar Bag



Qty 12 - Ladder Lights



Qty 4 - Transformer



Qty 4 - Transformer Power Cord



Qty 4 - Ladder Light Travel Bag




# **SET UP INSTRUCTIONS 1/2**


## **Set Up Pop Up Frame**



a. Place frame with the adjustable feet facing down.




**b.** Expand the frame.




c. Close frame by pushing the outside of the frame until male and female ends connect.


### **Insert Channel Bars**

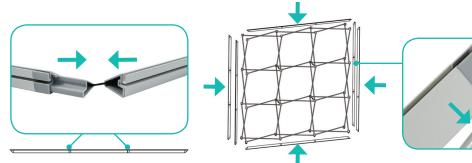

a. Expand each channel bar. Follow bungee to connect.



**b.** Attach channel bars to frame.



c. Slide channels bars onto frame, from top to bottom, then secure onto metal peg.



d. Attach the top and bottom endcaps on each side of the frame.

#### **Unfold The Hooks**



a. Locate each hook.



**b.** Turn each hook outward.



c. Twist each hook to face the front of the ladder light.

# SET UP INSTRUCTIONS 2/2

## **Hook Ladder Lights**



**a.** Hang ladder lights from top "x" bar. **Note:** Make sure to follow label that says "UP" or "DOWN".



**b.** Hang ladder lights in each section of the frame until reaching the bottom of the frame.

## **Connect Ladder Lights**



**a.** Connect each ladder light together using the barrel connectors.



**b.** Connect bottom set of lights to the LED Driver using the barrel connectors



**c.** Insert power cord to the LED Driver. Plug other side into your main power outlet.

## **Install Graphic**



**a.** In each corner, insert the silicone edge beading into the groove.



**b.** Then insert the remainder of the beading. Repeat blockout installation for the back frame.



**c.** Then repeat graphic installation on the end caps for each side.